

FEATURES

- | ESD protection of one automotive LIN-bus line
- | Asymmetrical diode configuration ensures an optimized protection against ElectroMagnetic Interferences (EMI) of a LIN Electronic Control Unit (ECU)
- | Meet AEC-Q101 Requirements

APPLICATIONS

- | LIN-bus protection
- | Automotive applications



SOD-323



Marking

IEC COMPATIBILITY

- | IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- | IEC61000-4-4 (EFT) 40A (5/50ns)

APPROVALS

- RoHS** | Compliance with 2011/65/EU
- HF** | Compliance with IEC61249-2-21:2003



Schematic Symbol



THERMAL CONSIDERATIONS

Symbol	Parameter	Value	Unit
P_{pp}	Peak Pulse Power ($t_p=8/20\mu\text{s}$ waveform)	160	Watts
T_j	junction temperature	150	$^{\circ}\text{C}$
T_{amb}	ambient temperature	-65 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-65 to +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS


Symbol	Parameter		Condition	Min.	Typ.	Max.	Unit
V_{RWM}	Reverse Stand-off Voltage	PESD1LIN (15 V)				15	V
		PESD1LIN (24 V)				24	
V_{BR}	Reverse Breakdown Voltage	PESD1LIN (15 V)	$I_T=5mA$	17.1	18.9	20.3	V
		PESD1LIN (24 V)		25.4	27.8	30.3	
I_R	Reverse Leakage Current	PESD1LIN (15 V)	$V_{RWM}=15V$		< 1	50	nA
		PESD1LIN (24 V)	$V_{RWM}=24V$		< 1	50	
V_C	Clamping Voltage	PESD1LIN (15 V)	$I_{PP}=1A, t_p=8/20\mu s$			25	V
			$I_{PP}=5A, t_p=8/20\mu s$			44	
V_C	Clamping Voltage	PESD1LIN (24 V)	$I_{PP}=1A, t_p=8/20\mu s$			40	V
			$I_{PP}=3A, t_p=8/20\mu s$			70	
rdif	Differential resistance	PESD1LIN (15 V)	$I_R = 1\text{ mA}$			225	Ω
		PESD1LIN (24 V)	$I_R = 1\text{ mA}$			300	
C_J	Diode capacitance		$V_R=0V, f=1MHz$		13	17	pF

CHARACTERISTIC CURVES

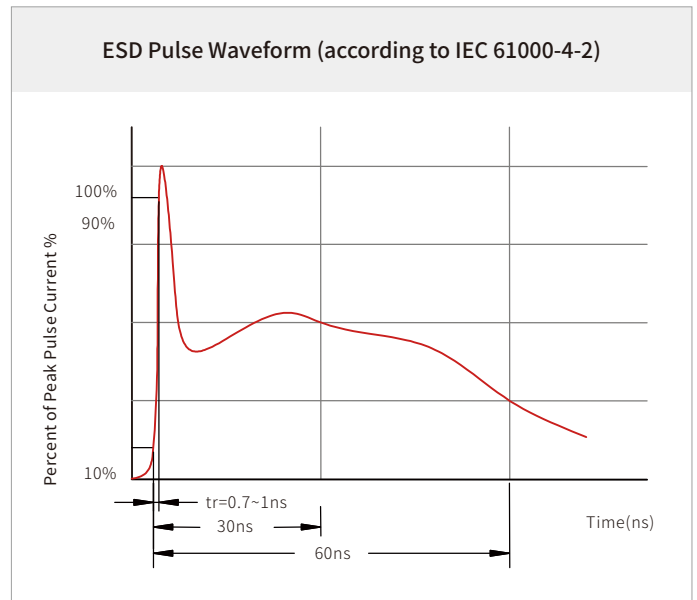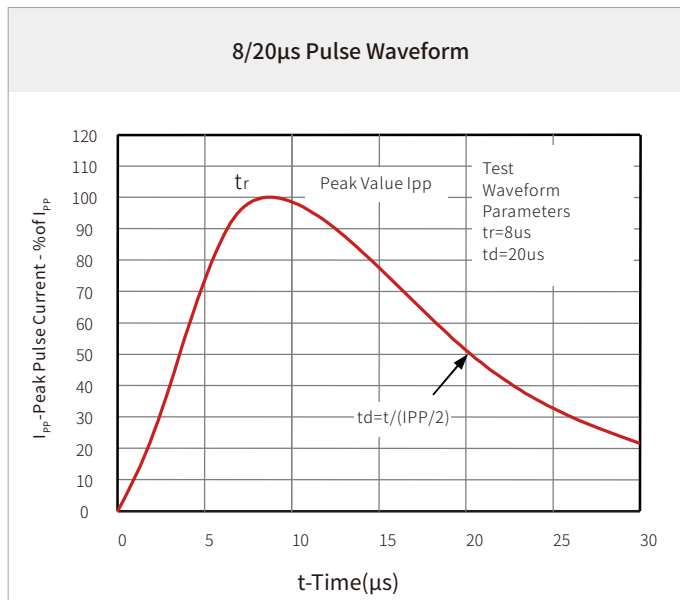


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

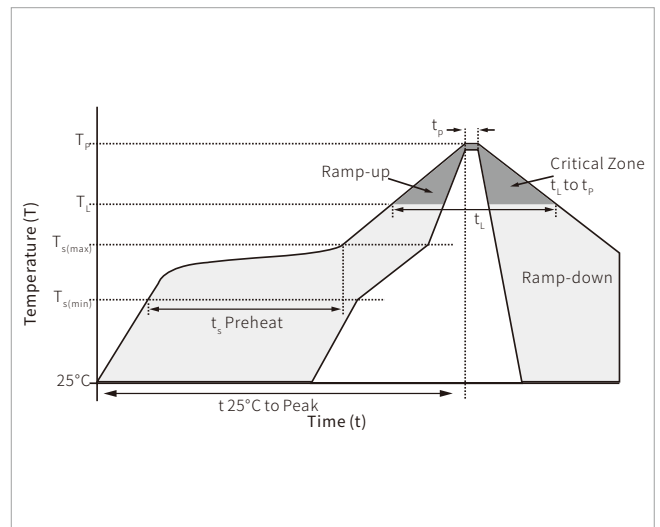


SOD-323 PACKAGE INFORMATION

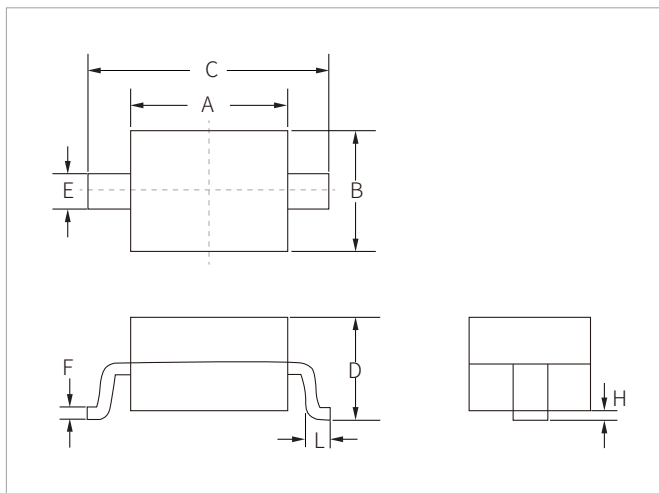

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.90	0.063	0.075
B	1.15	1.45	0.045	0.057
C	2.35	2.75	0.093	0.108
D	0.80	1.10	0.031	0.043
E	0.25	0.40	0.010	0.016
F	0.10	0.20	0.004	0.008
H	-	0.10	-	0.004
L	0.20	0.40	0.008	0.016

RECOMMENDED PAD LAYOUT DIMENSIONS

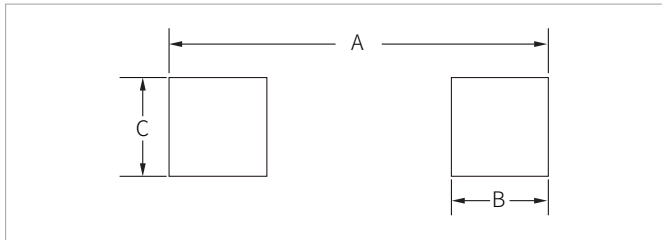

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.87	3.12	0.113	0.123
B	0.66	0.91	0.026	0.036
C	0.66	0.91	0.026	0.036

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
PESD1LIN	SOD-323	3000PCS	7"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.