



FEATURES

- | NPN Complements to BCX51Q,BCX52Q,BCX53Q
- | Low Voltage
- | High Current
- | Meet AEC-Q101 Requirements

MECHANICAL DATA

- | Medium Power General Purposes
- | Driver Stages of Audio Amplifiers



APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	Value	Unit
Collector-Base Voltage	BCX51Q	V_{CBO}	-45	V
	BCX52Q		-60	
	BCX53Q		-100	
Collector-Emitter Voltage	BCX51Q	V_{CEO}	-45	V
	BCX52Q		-60	
	BCX53Q		-80	
Emitter-Base Voltage		V_{EBO}	-5	
Collector Current		I_C	-1	A
Collector Power Dissipation		P_C	500	mW
Thermal Resistance From Junction To Ambient		$R_{\theta JA}$	250	°C/W
Junction Temperature		T_J	150	°C
Storage Temperature		T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS (T_A=25°C)


Parameter		Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Collector-base breakdown voltage	BCX51Q	V _{(BR)CBO}	I _C =100μA, I _E =0	-45			V
	BCX52Q			-60			
	BCX53Q			-100			
Collector-emitter breakdown voltage	BCX51Q	V _{(BR)CEO}	I _C =-1mA, I _B =0	-45			V
	BCX52Q			-60			
	BCX53Q			-80			
Emitter-base breakdown voltage		V _{(BR)EBO}	I _E =-100μA, I _C =0	-5			
Collector-Base cut-off current		I _{CBO}	V _{CB} =-30V, I _E =0			-0.1	μA
Emitter cut-off current		I _{EBO}	V _{EB} =-5V, I _C =0			-0.1	μA
DC Current Gain		h _{FE(1)}	V _{CE} =-2V, I _C =-5mA	63			
		h _{FE(2)}	V _{CE} =-2V, I _C =-150mA	63		250	
		h _{FE(3)}	V _{CE} =-2V, I _C =-0.5A	40			
Collector-Emitter Saturation Voltage		V _{CE(sat)}	I _C =-0.5A, I _B =-50mA			-0.5	V
Base-Emitter Voltage		V _{BE}	V _{CE} =-2V, I _C =0.5A			-1	V
Transition Frequency		f _T	V _{CE} =-5V, I _C =-10mA, f=100MHz		50		MHz

CLASSIFICATION OF H_{FE(2)}


Rank	BCX51Q	BCX51Q-10	BCX51Q-16	BCX52Q	BCX52Q-10	BCX52Q-16	BCX53Q	BCX53Q-10	BCX53Q-16
Range	63-250	63-160	100-250	63-250	63-160	100-250	63-250	63-160	100-250
Marking	AA	AC	AD	AE	AG	AM	AH	AK	AL

TYPICAL CHARACTERISTICS


Static Characteristic

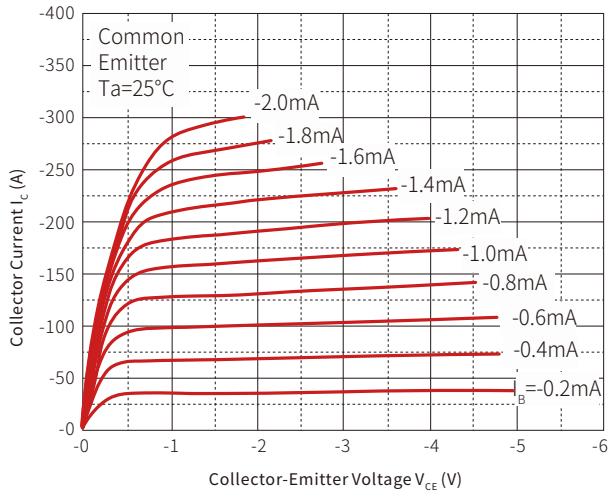


h_{FE} — I_C




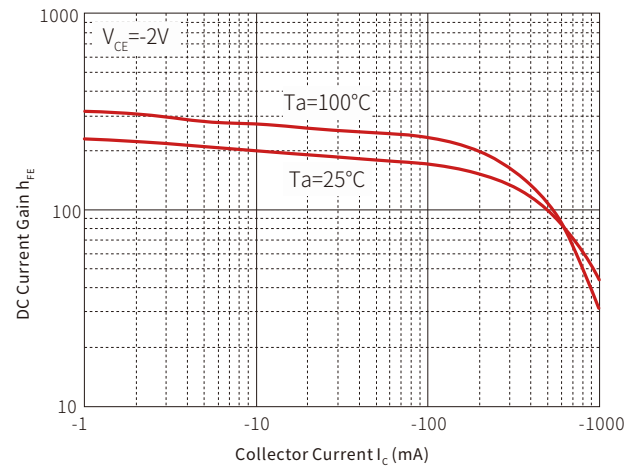


$V_{BE sat}$ — I_C

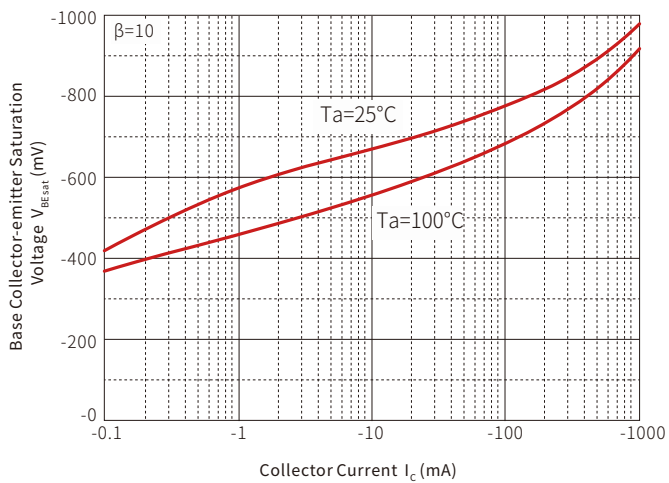


$V_{CE sat}$ — I_C

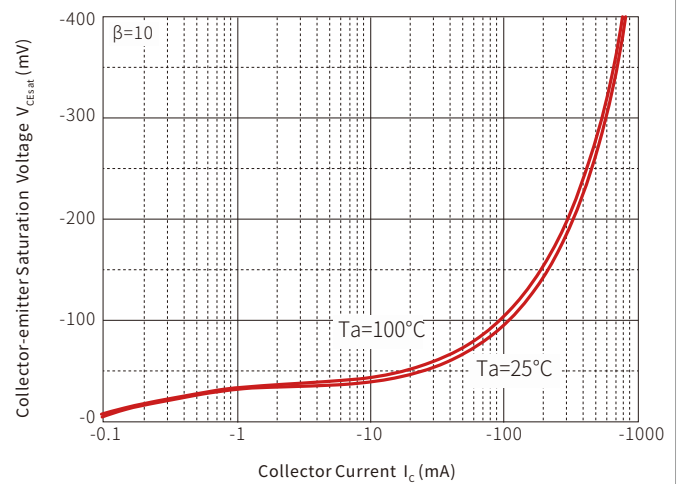

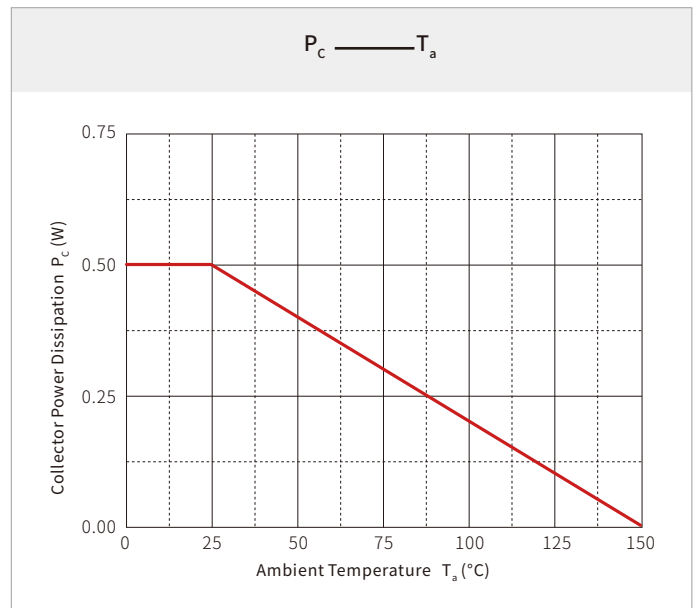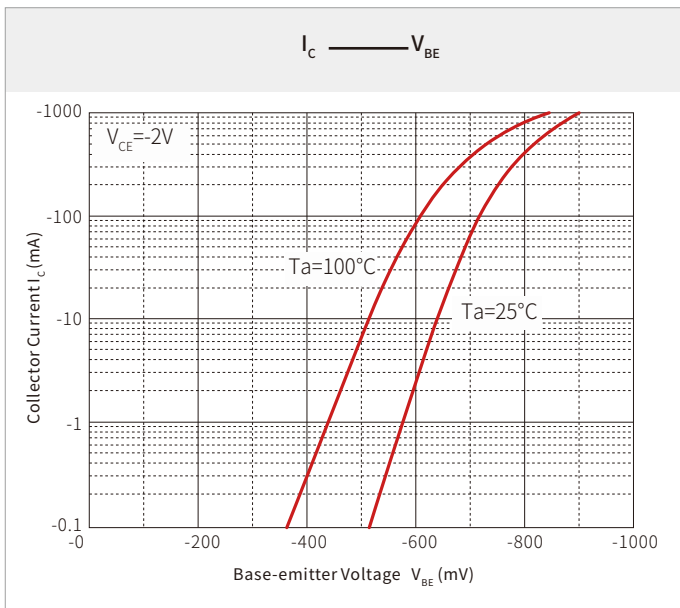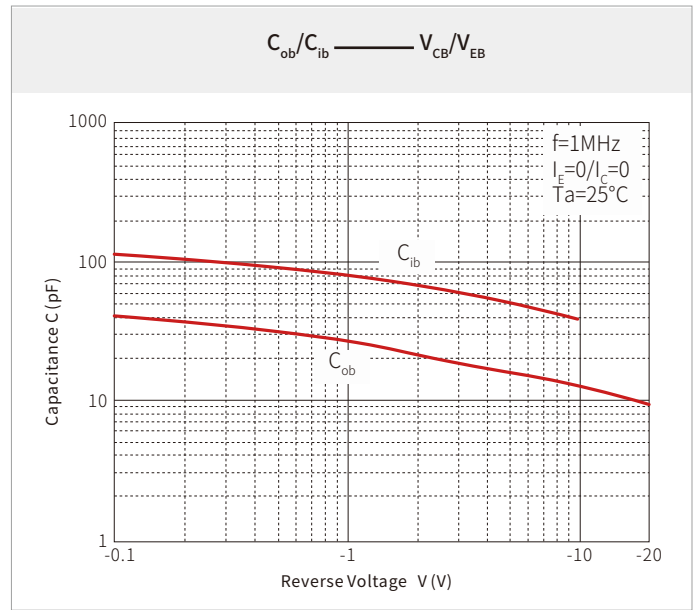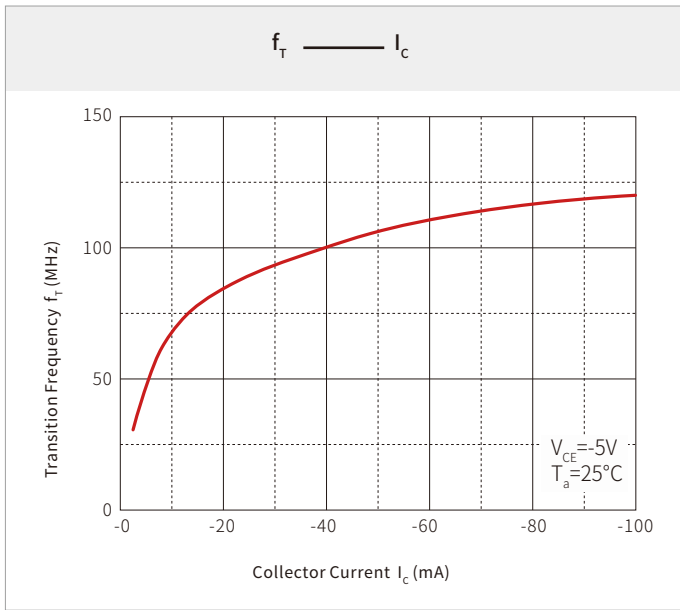


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

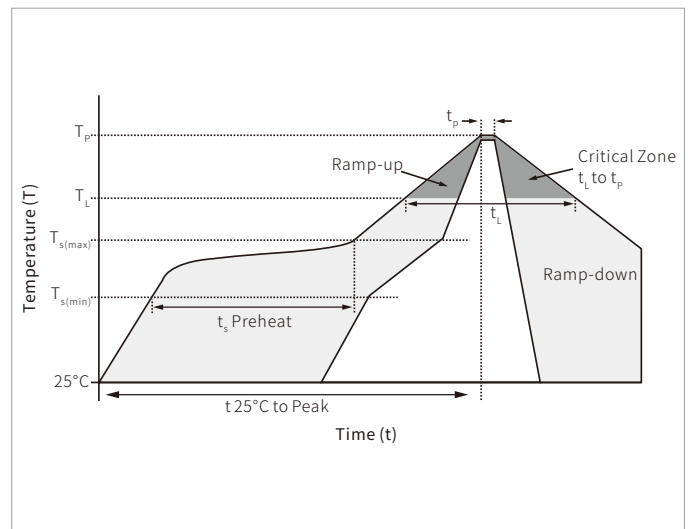

SOT-89 PACKAGE DIMENSIONS

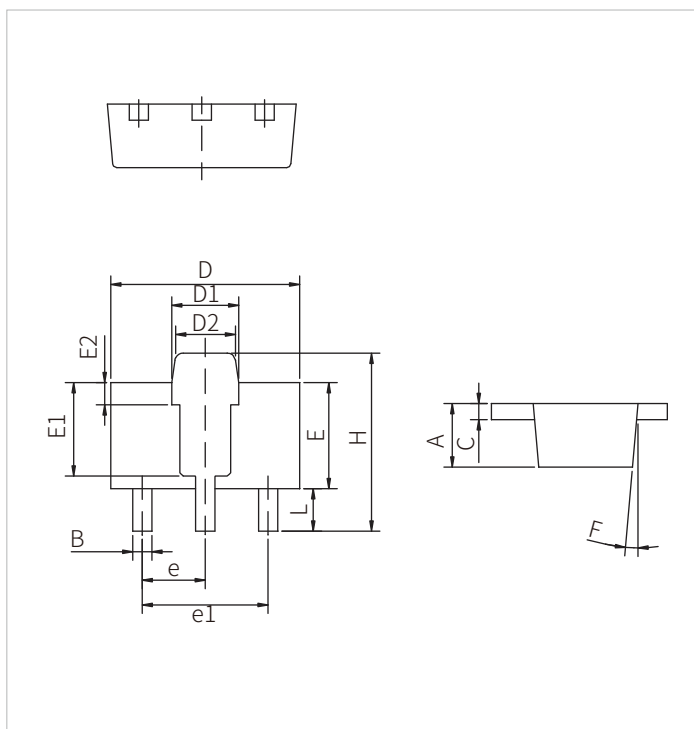

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.40		1.60	0.055		0.063
B	0.40		0.52	0.016		0.020
C	0.35		0.41	0.014		0.016
D	4.40		4.60	0.173		0.181
D1	1.50		1.70	0.059		0.067
D2	1.30		1.50	0.051		0.059
E	2.40		2.60	0.094		0.102
E1		2.20			0.087	
E2		0.52			0.020	
e		1.50			0.059	
e1		3.00			0.118	
F		5.00			5.000	
H	4.05		4.25	0.159		0.167
L	0.89		1.20	0.035		0.047

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Box	Carton	Reel Size
BCX51Q-BCX53Q	SOT-89	1000PCS	8000PCS	32000PCS	7"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.