


## FEATURES


- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



SOT-23



Marking



Schematic Symbol

## APPROVALS

|             |                                    |
|-------------|------------------------------------|
| <b>RoHS</b> | Compliance with 2011/65/EU         |
| <b>HF</b>   | Compliance with IEC61249-2-21:2003 |

## MAXIMUM RATINGS ( $T_A=25^{\circ}\text{C}$ )

| Parameter                                        | Symbol         | Value      | Unit               |
|--------------------------------------------------|----------------|------------|--------------------|
| Supply Voltage                                   | $V_{CC}$       | 50         | V                  |
| Input Voltage                                    | $V_{IN}$       | -5 ~ +12   | V                  |
| Output Current                                   | $I_O$          | 100        | mA                 |
| Power Dissipation                                | $P_D$          | 200        | mW                 |
| Operation Junction and Storage Temperature Range | $T_J, T_{stg}$ | -55 ~ +150 | $^{\circ}\text{C}$ |

## ELECTRICAL CHARACTERISTICS( $T_A=25^{\circ}\text{C}$ )

| Parameter            | Symbol       | Test Conditions                            | Min. | Typ. | Max. | Unit             |
|----------------------|--------------|--------------------------------------------|------|------|------|------------------|
| Input voltage        | $V_{I(off)}$ | $V_{CC}=5V, I_O=0.1\text{mA}$              | 0.3  |      |      | V                |
|                      | $V_{I(on)}$  | $V_O=0.3V, I_O=20\text{mA}$                |      |      | 3.0  | V                |
| Output voltage       | $V_{O(on)}$  | $I_O/I_I=10\text{mA}/0.5\text{mA}$         |      | 0.1  | 0.3  | V                |
| Input current        | $I_I$        | $V_I=5V$                                   |      |      | 3.8  | mA               |
| Output current       | $I_{O(off)}$ | $V_{CC}=50V, V_I=0$                        |      |      | 0.5  | $\mu\text{A}$    |
| DC current gain      | $G_I$        | $V_O=5V, I_O=10\text{mA}$                  | 33   |      |      |                  |
| Input resistance     | $R_I$        |                                            | 1.54 | 2.2  | 2.86 | $\text{k}\Omega$ |
| Resistance ratio     | $R_2/R_1$    |                                            | 3.6  | 4.5  | 5.5  |                  |
| Transition frequency | $f_T$        | $V_O=10V, I_O=5\text{mA}, f=100\text{MHz}$ |      | 250  |      | MHz              |

## CHARACTERISTIC CURVES

Fig.1 ON Characteristics






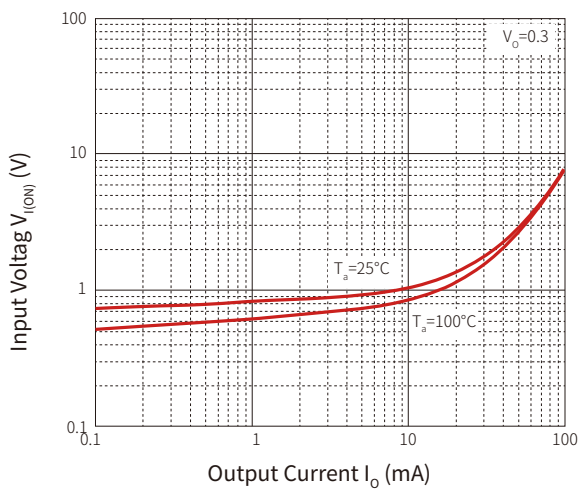



Fig.2 OFF Characteristics

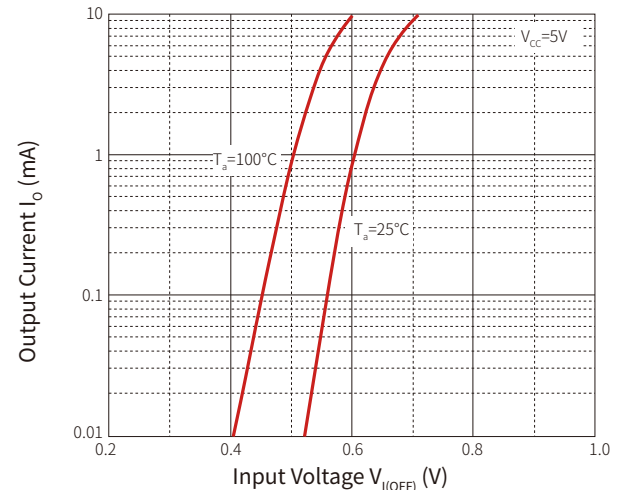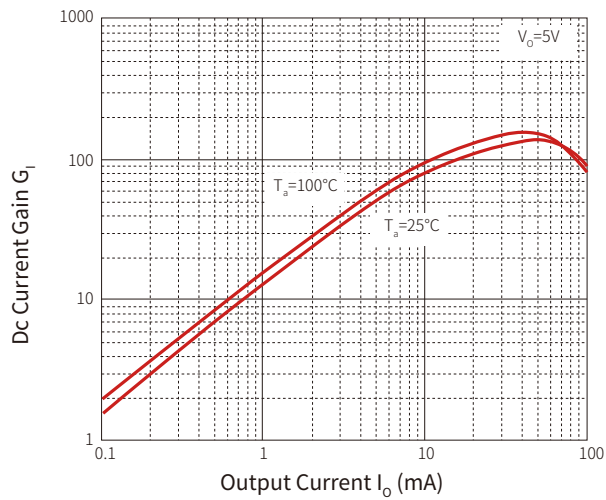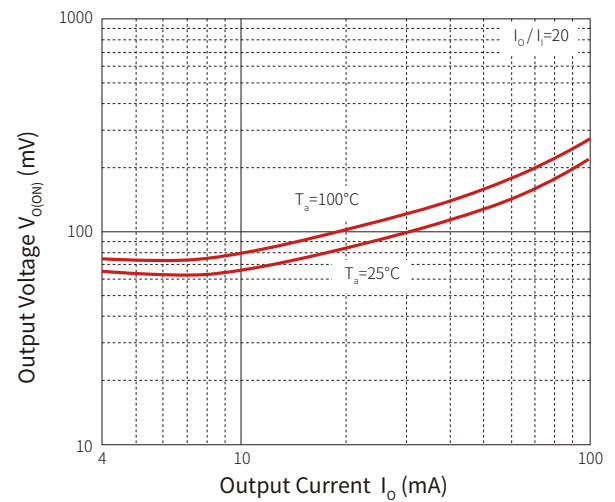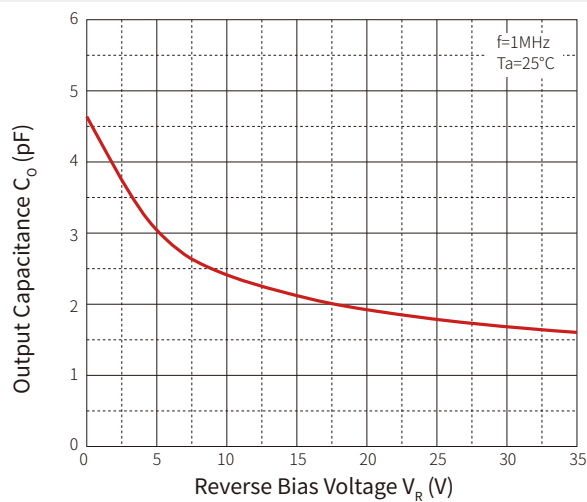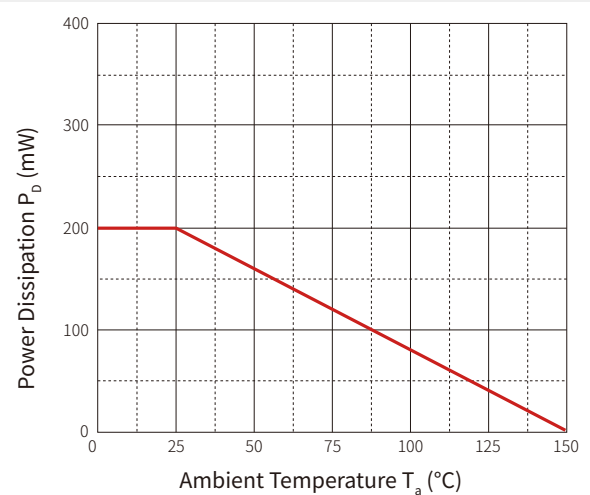


**Fig.3  $G_I$  —  $I_O$** 

**Fig.4  $V_{O(ON)}$  —  $I_O$** 

**Fig.5  $C_O$  —  $V_R$** 

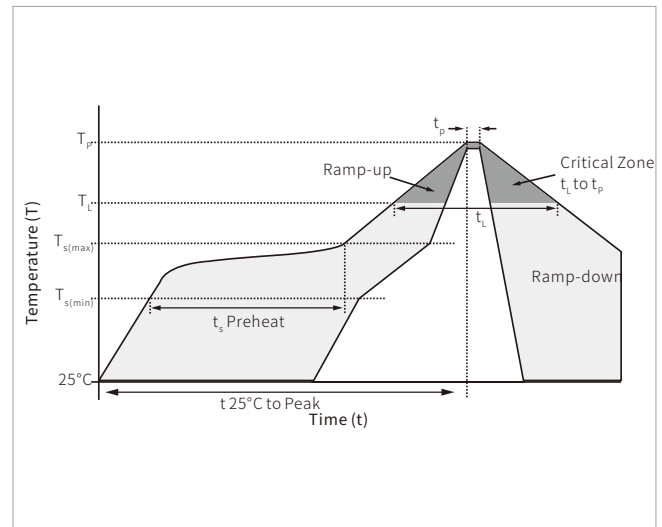**Fig.6  $P_D$  —  $T_a$** 


## SOLDERING PARAMETERS
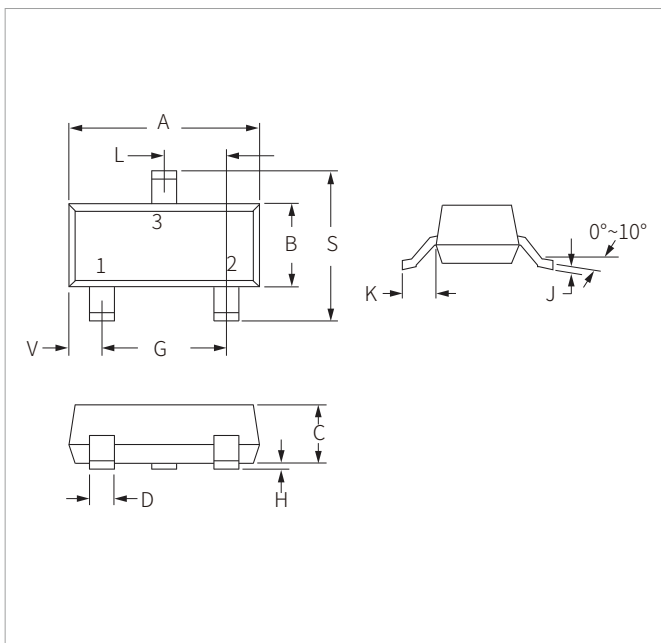
| Reflow Condition                                      |                                  | Lead-free assembly |
|-------------------------------------------------------|----------------------------------|--------------------|
| Pre Heat                                              | Temperature Max ( $T_{s(min)}$ ) | 150°C              |
|                                                       | Temperature Max ( $T_{s(max)}$ ) | 200°C              |
|                                                       | Time (min to max) ( $t_s$ )      | 60 – 180 secs      |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak |                                  | 3°C/second max     |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                  |                                  | 3°C/second max     |
| Reflow                                                | Temperature ( $T_L$ ) (Liquidus) | 217°C              |
|                                                       | Time (min to max) ( $t_L$ )      | 60 – 150 seconds   |
| Peak Temperature ( $T_p$ )                            |                                  | 260°C              |
| Time within 5°C of actual peak Temperature ( $t_p$ )  |                                  | 20 – 40 seconds    |
| Ramp-down Rate                                        |                                  | 6°C/second max     |
| Time 25°C to peak Temperature ( $T_p$ )               |                                  | 8 minutes max.     |
| Do not exceed                                         |                                  | 260°C              |




## SOT-23 PACKAGE INFORMATION



| Ref. | Millimeters |       | Inches |       |
|------|-------------|-------|--------|-------|
|      | Min.        | Max.  | Min.   | Max.  |
| A    | 2.80        | 3.05  | 0.110  | 0.120 |
| B    | 1.20        | 1.40  | 0.047  | 0.055 |
| C    | 0.90        | 1.15  | 0.035  | 0.045 |
| D    | 0.37        | 0.50  | 0.015  | 0.020 |
| G    | 1.75        | 2.05  | 0.069  | 0.081 |
| H    | 0.01        | 0.100 | 0.001  | 0.004 |
| J    | 0.085       | 0.180 | 0.003  | 0.007 |
| K    | 0.35        | 0.69  | 0.014  | 0.029 |
| L    | 0.89        | 1.02  | 0.035  | 0.040 |
| S    | 2.10        | 2.65  | 0.083  | 0.104 |
| V    | 0.45        | 0.60  | 0.018  | 0.024 |

## RECOMMENDED PAD LAYOUT DIMENSIONS

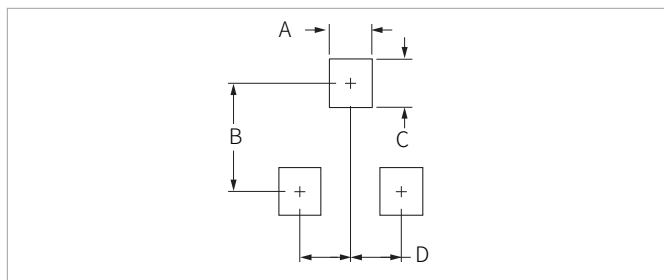

| Ref. | Millimeters |      | Inches |       |
|------|-------------|------|--------|-------|
|      | Min.        | Max. | Min.   | Max.  |
| A    | 0.71        | 0.97 | 0.028  | 0.038 |
| B    | 1.88        | 2.13 | 0.074  | 0.084 |
| C    | 0.71        | 0.97 | 0.028  | 0.038 |
| D    | 0.81        | 1.07 | 0.032  | 0.042 |

## ORDERING INFORMATION

| Part Number | Component Package | QTY/Reel | Reel Size |
|-------------|-------------------|----------|-----------|
| DTC123YCA   | SOT-23            | 3000PCS  | 7"        |

**Headquarters**

No.3387 Shendu Road  
Pujiang I&E Park  
Minhang Shanghai China  
201000

**Hotline**

400-021-5756

**Web**

<https://www.semiware.com>

**Sales Center**

Tel: 86-21-3463-7458  
Email: [sales18@semiware.com](mailto:sales18@semiware.com)

**Customer Service**

Tel: 86-21-5484-1001  
Email: [sales17@semiware.com](mailto:sales17@semiware.com)

**Technical Support**

Tel: 86-21-3463-7654  
Email: [fae01@semiware.com](mailto:fae01@semiware.com)

**Complaint & Suggestions**

Tel: 86-21-3463-7172  
Ext: 8868  
Email: [cs03@semiware.com](mailto:cs03@semiware.com)

**By QR Code**

Website



Wechat

To find your local partner within Semiware's global website: [www.semiware.com](http://www.semiware.com)

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.