


FEATURES

Construction Utilizes Void-free Molded Plastic Technique

Low Reverse Leakage

High Forward Surge Current Capability



MECHANICAL DATA

Case : Molded Plastic Body

Polarity : Polarity Symbol Marking On Body

Mounting Position : Any



Schematic Symbol

APPROVALS

RoHS Compliance with 2011/65/EU

HF Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	MBR 2040VCT MBR 2040CT	MBR 2045VCT MBR 2045CT	MBR 2060VCT MBR 2060CT	MBR 20100VCT MBR 20100CT	MBR 20150VCT MBR 20150CT	MBR 20200VCT MBR 20200CT	Unit
Marking									
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	40	45	60	100	150	200	V
Maximum RMS Voltage		V _{RMS}	28	31.5	42	70	105	140	V
Maximum DC Blocking Voltage		V _{DC}	40	45	60	100	150	200	V
Maximum Average Forward Rectified Current at T _c =110°C	per device	I _(AV)	20.0						A
	per diode		10.0						
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load		I _{FSM}	150.0						A
Maximum Instantaneous Forward Voltage Per Diode at 10.0A		V _F	0.65		0.75	0.85	0.95		V
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A =25°C	I _R	0.5			0.05			mA
	T _A =125°C		50			10			mA
Typical Thermal Resistance		R _{θJC}	3.5						°C/W
Operating Junction Temperature Range		T _J	-55 to +150						°C
Storage Temperature Range		T _{STG}	-55 to +150						°C

CHARACTERISTIC CURVES

Fig. 1- Derating Curve Output Rectified Current

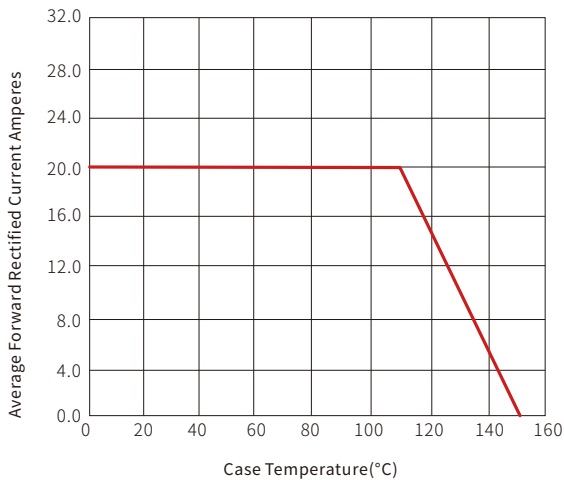


Fig. 2-Maximum Non-Repetitive Peak Forward Surge Current Perleg

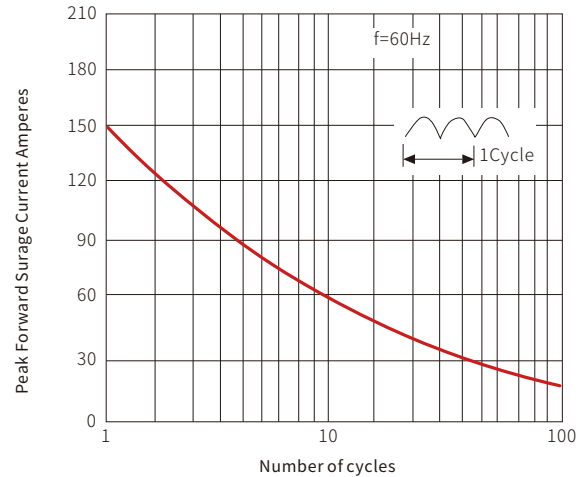


Fig. 3-Typical Forward Voltage Characteristics



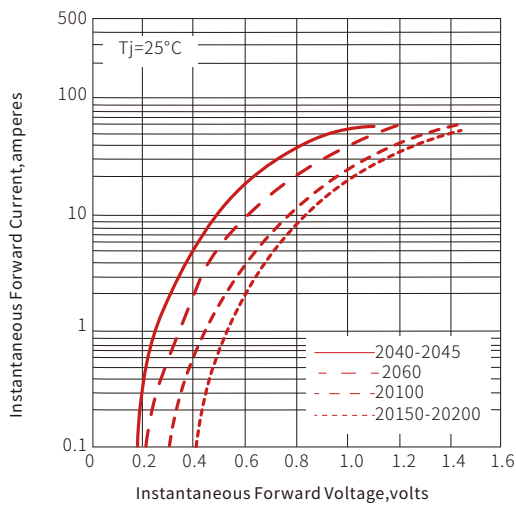


Fig. 4-Typical Reverse Leakage Characteristics

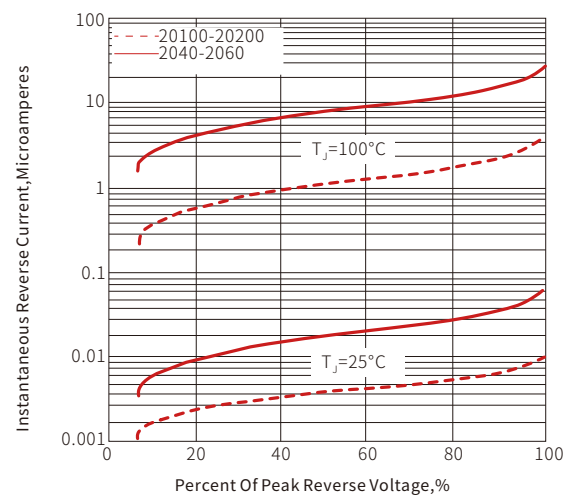


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_l)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

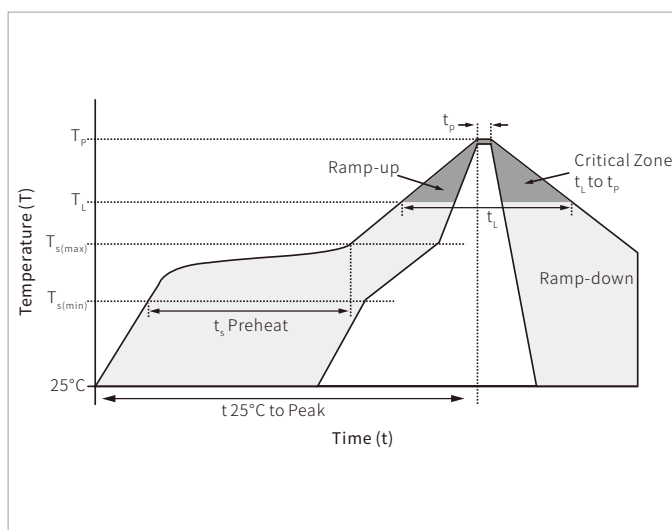

TO-263 PACKAGE MECHANICAL DATA

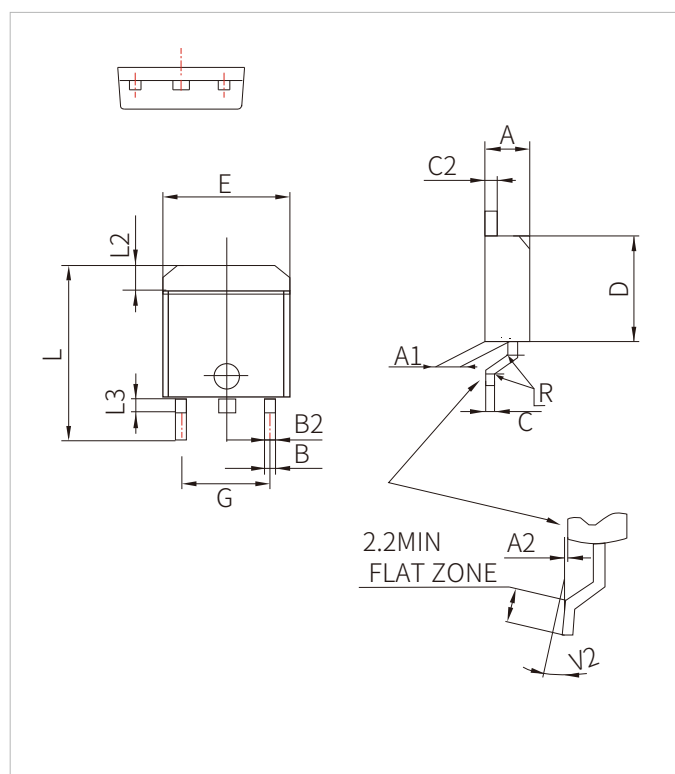

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.30		4.60	0.169		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.70		0.93	0.027		0.037
B2	1.25	1.40		0.048	0.055	
C	0.45		0.60	0.017		0.024
C2	1.21		1.36	0.047		0.054
D	8.95		9.35	0.352		0.368
E	9.80		10.28	0.386		0.405
G	4.88		5.28	0.192		0.208
L	14.80		15.85	0.583		0.624
L2	1.27		1.40	0.050		0.055
L3	1.40		1.75	0.055		0.069
R		0.40			0.016	
V2	0°		8°	0°		8°

ORDERING INFORMATION

Part Number	Package	QTY/Reel	Reel Size
MBR2040VCT-MBR20200VCT	TO-263	800PCS	13"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware' s global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.