



FEATURES

- | Metal silicon junction, majority carrier conduction
- | Plastic material used carries Underwriters Laboratory Classifications 94V-0
- | High surge capability
- | Low power loss, high efficiency
- | High current capability, low forward voltage drop
- | For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- | Guardring for overvoltage protection



TO-220AB



Schematic Symbol

MECHANICAL DATA

- | Cases: JEDEC TO-220AB molded plastic
- | Polarity: As marked
- | Terminals: Pure tin plated, lead free. solderable per MIL-STD-750, Method 2026
- | Mounting position: Any

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	MBR 3040	MBR 3045	MBR 3050	MBR 3060	MBR 3080	MBR 30100	MBR 30150	MBR 30200	Unit	
Marking			MBR 3040	MBR 3045	MBR 3050	MBR 3060	MBR 3080	MBR 30100	MBR 30150	MBR 30200		
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	40	45	50	60	80	100	150	200	V	
Maximum RMS Voltage		V _{RMS}	28	31	35	42	56	70	105	140	V	
Maximum DC Blocking Voltage		V _{DC}	40	45	50	60	80	100	150	200	V	
Maximum Average Forward Rectified Current at T _C =130°C		I _{F(AV)}	30									A
Peak Repetitive Forward Current (Rated V _R , Square Wave, 20KHz) at T _C =130°C		I _{FRM}	30									A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed On Rated Load(JEDEC method)		I _{FSM}	200									A
Peak Repetitive Reverse Surge Current (Note 2)		I _{RRM}	1.0				0.5				A	
Maximum Instantaneous Forward Voltage at	I _F =15A, T _A =25°C	V _F	0.7		0.75		0.84		0.95		V	
	I _F =15A, T _A =125°C		0.6		0.65		0.70		0.80			
	I _F =30A, T _A =25°C		0.82		0.90		0.94		1.05			
	I _F =30A, T _A =125°C		0.73		0.78		0.82		0.92			
Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage Per Leg(Note 1)	@T _A =25°C	I _R	0.2		0.2		0.2		0.1		mA	
	@T _A =125°C		15		10		7.5		5.0			
Voltage Rate of Change (Ratd V _R)		dV/dt	10000									V/μS
Typical Junction Capacitance @4V 1.0 MHz		C _j	600		460		320					pF
Maximum Thermal Resistance Per Leg (Note 3)		R _{θJC}	1.0				1.5					°C/W
Operating Junction Temperature Range		T _J	-65 to +150									°C
Storage Temperature Range		T _{STG}	-65 to +175									°C

Notes: 1. Pulse Test: 300 μs Pulse Width, 1% Duty Cycle
2. 2.0 μs Pulse Width, f=1.0 KHz
3. Mount on Heatsink Size of (4"x6"x0.25") Al-Plate

CHARACTERISTIC CURVES

Fig. 1- Forward Current Derating Curve

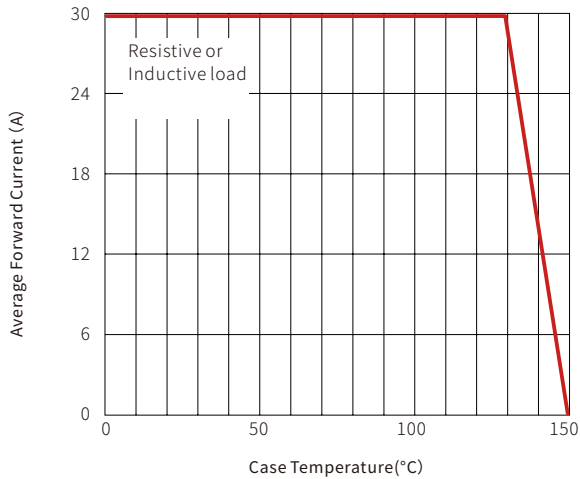


Fig. 2-Maximum Non-Repetitive Forward Surge Current Per leg

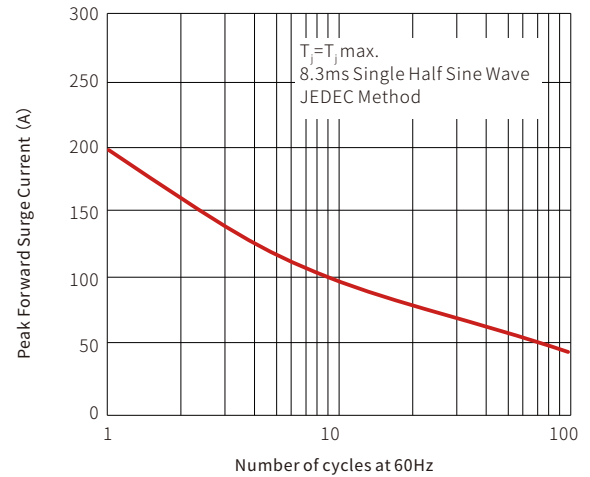


Fig. 3-Typical Instantaneous Forward Characteristics Per leg





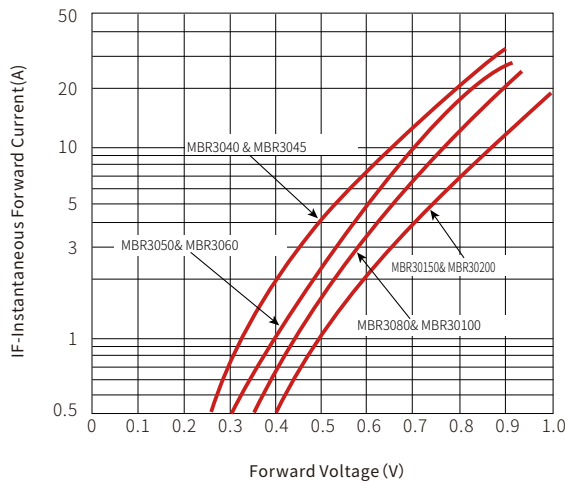


Fig. 4-Typical Reverse Characteristics Per leg




**Fig. 5- Typical Junction Capacitance Per leg****Fig. 6-Typical Transient Thermal Impedance Per leg**

WAVE SOLDERING

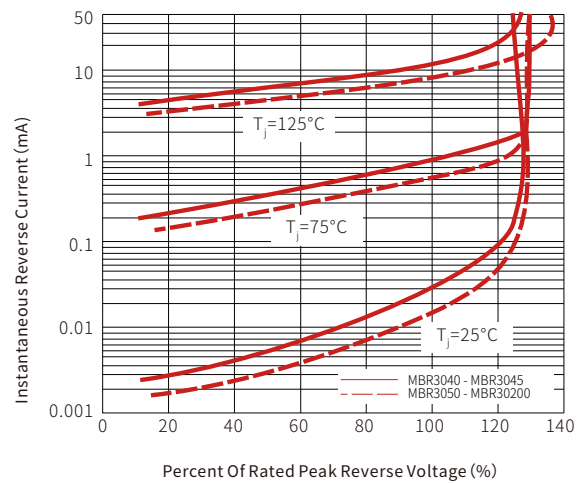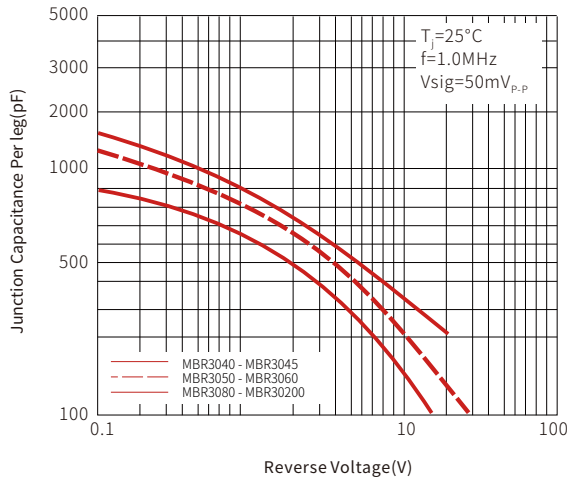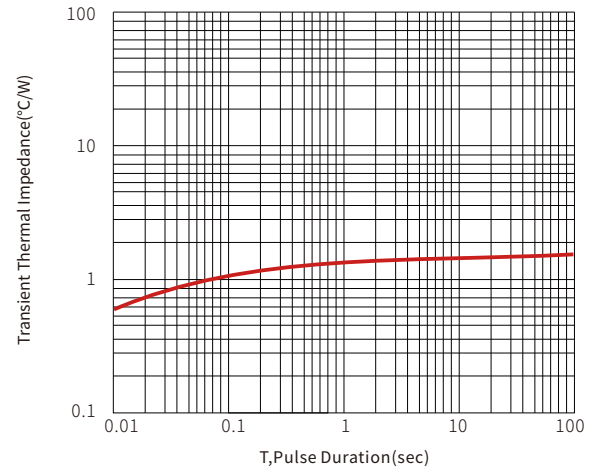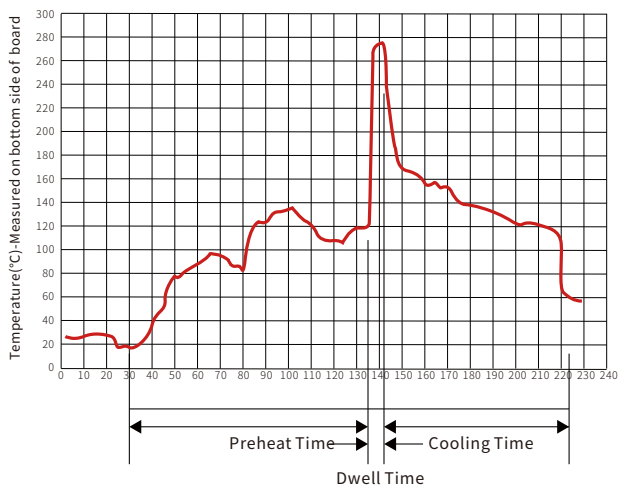

Wave Parameter		Lead-free assembly
Pre Heat	Temperature Min	100 $^\circ\text{C}$
	Temperature Max	150 $^\circ\text{C}$
	Time(min to max)	60 – 180 secs
Solder pot Temperature		280 $^\circ\text{C}$ Max
Solder Dwell Time		2-5 seconds

TO-220AB PACKAGE MECHANICAL DATA

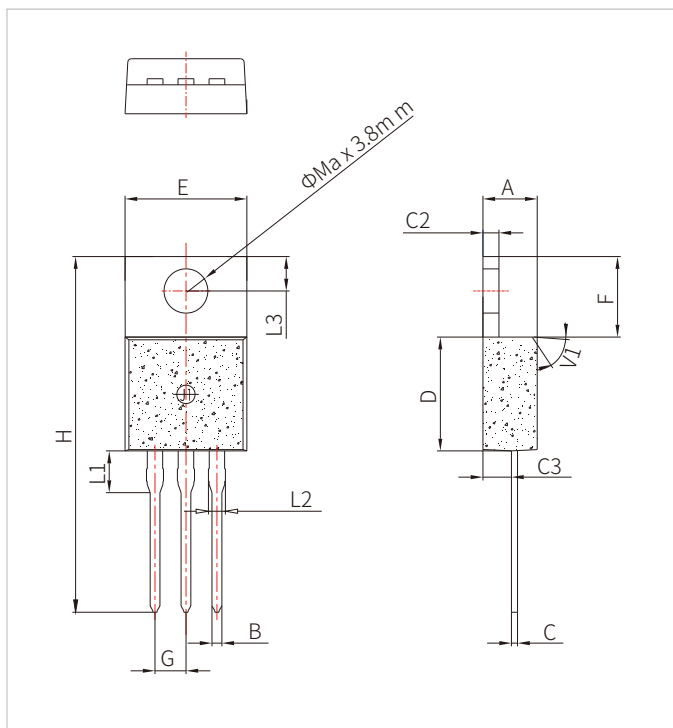

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.80		10.4	0.386		0.409
F	6.55		6.95	0.258		0.274
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

ORDERING INFORMATION

Part Number	Component Package	QTY/Tube	QTY/Box	QTY/Carton
MBR3040-MBR30200	TO-220AB	50PCS	1000PCS	5000PCS

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware' s global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.