


FEATURES

- | Working peak reverse voltage 3V to 26V
- | Standard Zener breakdown voltage 5.6V to 33V
- | Peak power 24 or 40 Watts @ 1.0ms (unidirectional) per Figure 6
Wave form
- | ESD Rating: Class 3B (>16kV) per the Human Body Model
Class C (>400V) per Machine Model
- | ESD Rating of IEC61000-4-2 level 4, ± 30 kV contact Discharge
- | Low leakage < 5.0 μ A



SOT-23



Schematic Symbol

APPLICATIONS

- | Computers
- | Printers
- | Business Machines
- | Communication systems
- | Medical equipment

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	Value	Unit
Peak Power Dissipation @1.0ms	MMBZ5V6AL thru MMBZ10AL	P_{PK}	24	W
	MMBZ12VAL thru MMBZ33VAL		40	W
Total Power Dissipation		P_D	200	mW
Operating Temperature		T_{OPT}	-55 to +150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55 to +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Part Number	Device Marking Code	V_{RWM}	I_R	V_{BR}				Z_{ZT}	Z_{ZK}		V_C		θV_{BR}
		(V)	@ V_{RWM}	Min	Nom	Max	@ I_T	Max@ I_{ZT}	Max	@ I_{ZK}	Max	@ I_{PP}	
			(μA)	(V)	(V)	(V)	(mA)	(Ω)	(Ω)	(mA)	(V)	(A)	
24 WATTS													
MMBZ5V6AL	5A6	3.0	5.0	5.32	5.6	5.88	20	11	1600	0.25	8.0	3.0	1.26
MMBZ6V2AL	6A2	3.0	0.5	5.89	6.2	6.51	1.0	-	-	-	8.7	2.76	2.80
MMBZ6V8AL	6A8	4.5	0.5	6.46	6.8	7.14	1.0	-	-	-	9.6	2.5	3.4
MMBZ9V1AL	9A1	6.0	0.3	8.65	9.1	9.56	1.0	-	-	-	14	1.7	7.5
MMBZ10VAL	10A	6.5	0.3	9.50	10	10.5	1.0	-	-	-	14	1.7	7.5

$V_F=0.9V$ Max @ $I_F=10mA$


Part Number	Device Marking Code	V _{RWM}	I _R	V _{BR}				V _c (note1)		θV _{BR} mV/°C
		(V)	@ V _{RWM}	Min	Nom	Max	@ I _T	Max	@ I _{pp}	
			(μA)	(V)	(V)	(V)	(mA)	(V)	(A)	
40 WATTS										
MMBZ12VAL	12A	8.5	200	11.40	12	12.60	1	17	2.35	7.5
MMBZ15VAL	15A	12.0	50	14.25	15	15.75	1	21	1.90	12.3
MMBZ18VAL	18A	14.5	50	17.10	18	18.90	1	25	1.60	15.3
MMBZ20VAL	20A	16.0	50	19	20	21	1	38	1.0	17.2
MMBZ27VAL	27A	22.0	50	25.65	27	28.35	1	40	1.0	24.3
MMBZ33VAL	33A	26.0	50	31.35	33	34.65	1	46	0.87	30.4

$V_F=0.9V$ Max @ $I_F=10mA$


Note 1: Surge Current waveform per Figure 5

CHARACTERISTIC CURVES


Typical Breakdown Voltage Versus Temperature

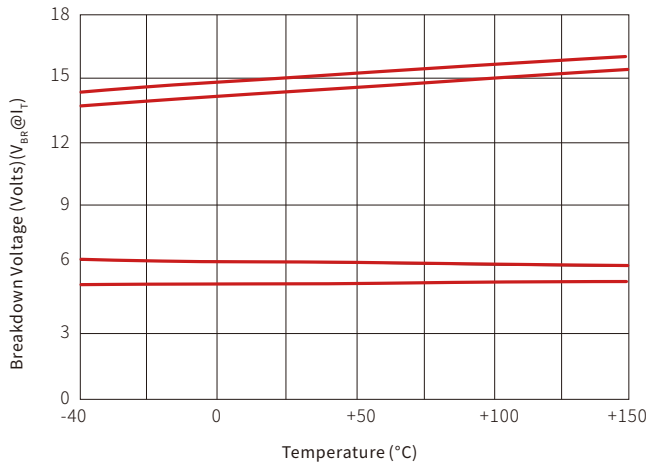


Typical Leakage Current Versus Temperature




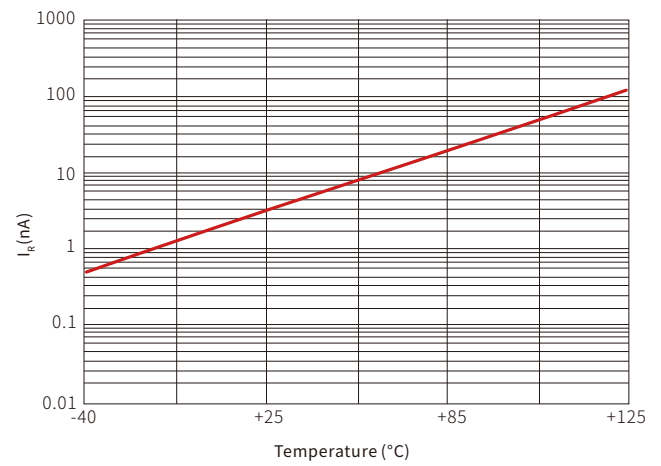


Typical Capacitance Versus Bias Voltage

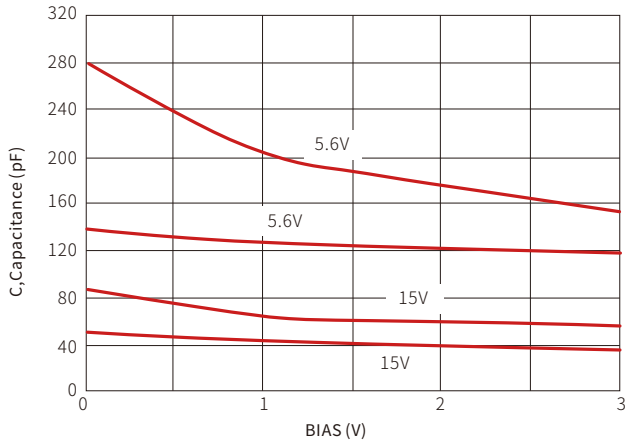


Typical Capacitance Versus Bias Voltage

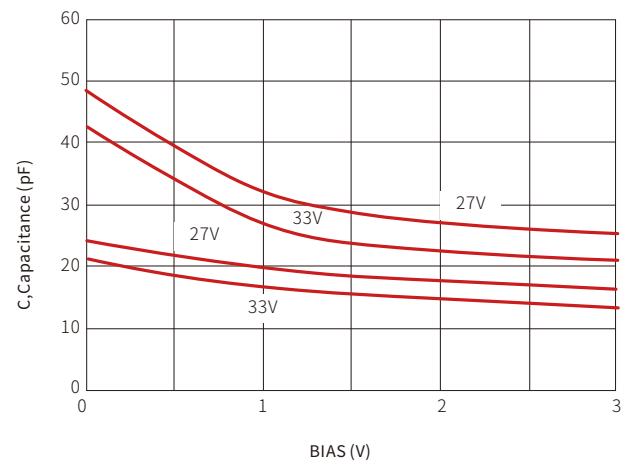

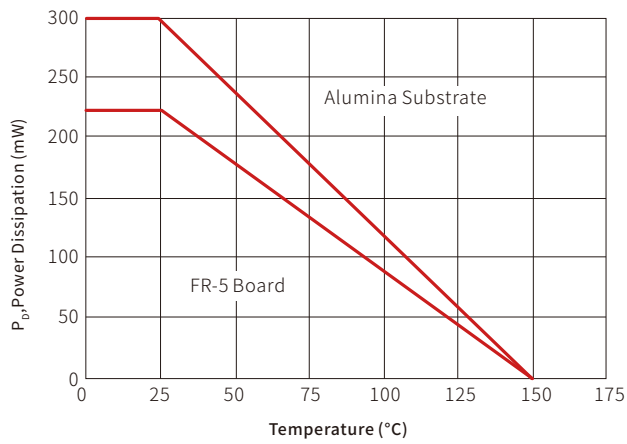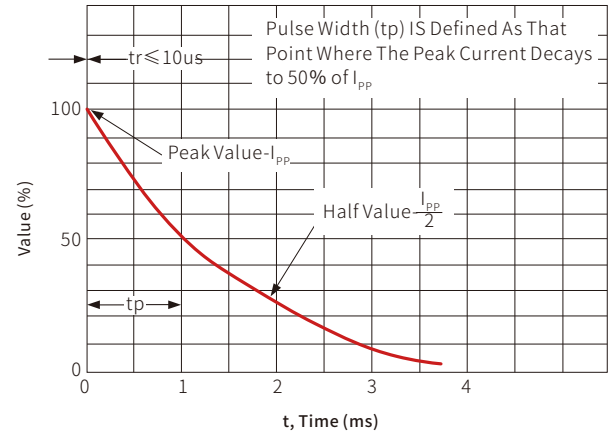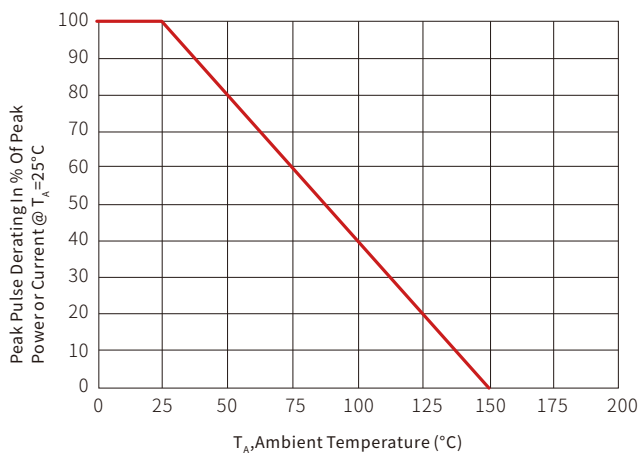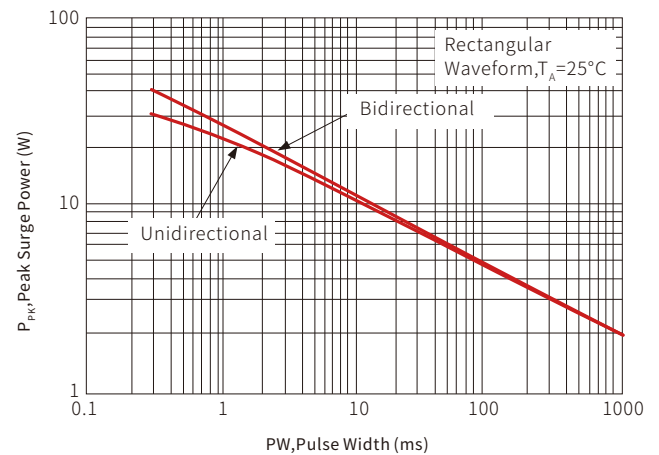
Steady State Power Derating Curve

Pulse Waveform

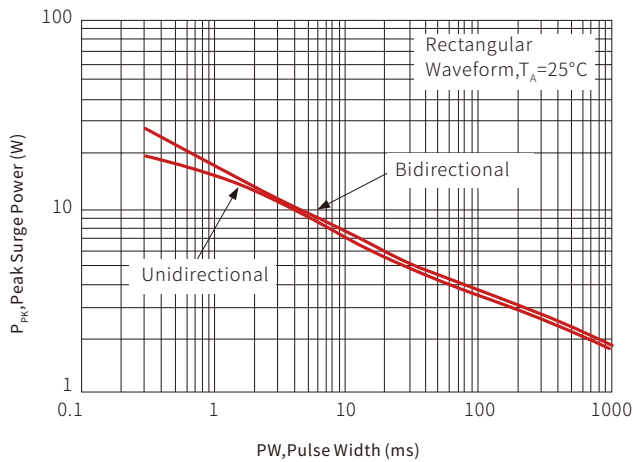Pulse Derating Curve

Maximum Non-Repetitive Surge Power, P_{PK} Versus PW


Maximum Non-Repetitive Surge Power, $P_{PK}(NOM)$ Versus PW

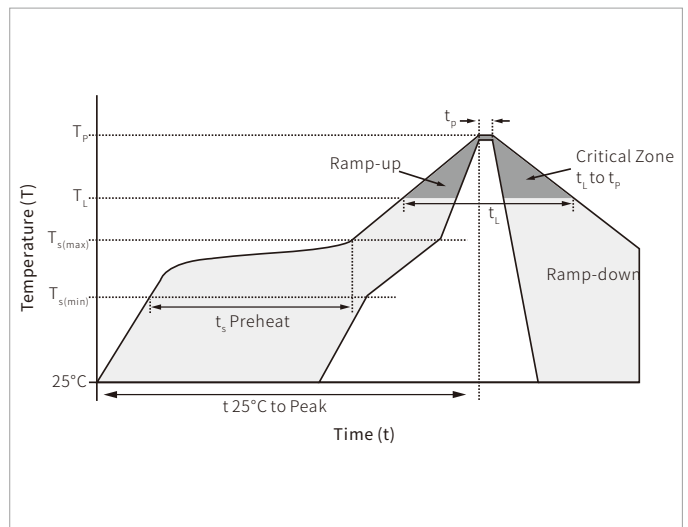


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C




SOT-23 PACKAGE INFORMATION

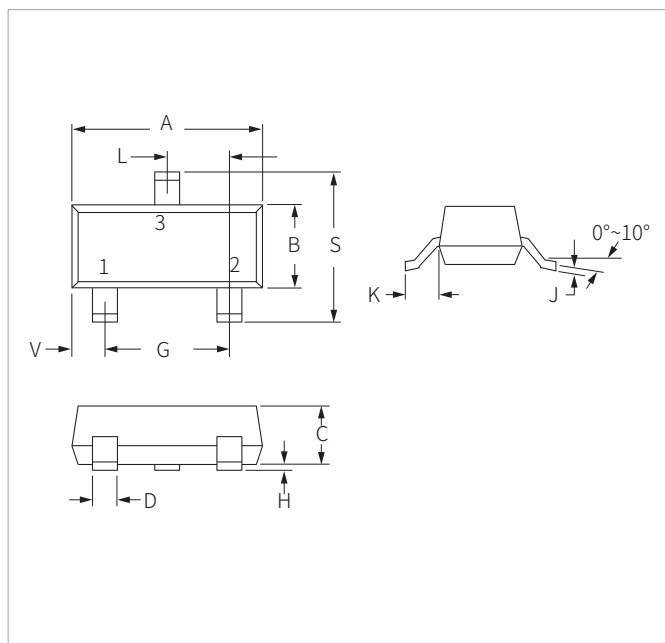

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.80	3.05	0.110	0.120
B	1.20	1.40	0.047	0.055
C	0.90	1.15	0.035	0.045
D	0.37	0.50	0.015	0.020
G	1.75	2.05	0.069	0.081
H	0.01	0.100	0.001	0.004
J	0.085	0.180	0.003	0.007
K	0.35	0.69	0.014	0.029
L	0.89	1.02	0.035	0.040
S	2.10	2.65	0.083	0.104
V	0.45	0.60	0.018	0.024

RECOMMENDED PAD LAYOUT DIMENSIONS

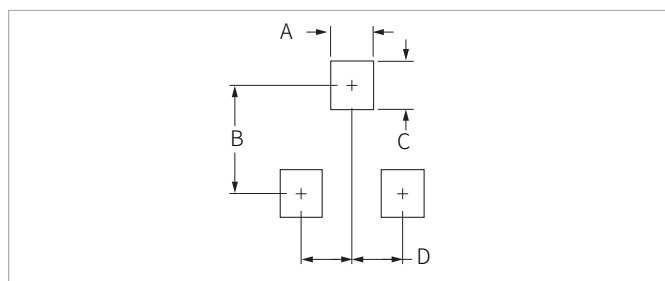

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.71	0.97	0.028	0.038
B	1.88	2.13	0.074	0.084
C	0.71	0.97	0.028	0.038
D	0.81	1.07	0.032	0.042

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
MMBZxxxAL	SOT-23	3000PCS	7"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.