


FEATURES


- Zero reverse recovery current
- Zero forward recovery voltage
- High frequency operation
- Switching characteristics independent of temperature
- Fast switch
- Positive temperature coefficient of forward voltage (V_F)



TO-220F

APPLICATION

- Switch mode power supplies(SMPS)
- Boost diodes in PFC or DC/DC stages
- Free wheeling diodes in inverter stages
- AC/DC converters



Schematic Symbol

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	650	V
Maximum DC Blocking Voltage		V_{DC}	650	V
Average Forward Current	$T_c=135^{\circ}\text{C}$	$I_{F(AV)}$	10	A
Repetitive Peak Forward Surge Current	$t_p=10\text{ms}, T_c=25^{\circ}\text{C}$	I_{FRM}	70	
Non-Repetitive Peak Forward Surge Current	$t_p=10\text{ms}, T_c=25^{\circ}\text{C}$	I_{FSM}	92	
	$T_c=25^{\circ}\text{C}, t_p=10\mu\text{s}, \text{Pulse}$	I_{FMax}	270	
Power Dissipation	$T_c=25^{\circ}\text{C}$	P_{tot}	71	W
	$T_c=110^{\circ}\text{C}$		30	
Thermal Resistance from Junction to Case		$R_{th(j-c)}$	2.1	$^{\circ}\text{C}/\text{W}$
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55 to +175	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS($T_A=25^{\circ}\text{C}$)

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	$I_F = 10\text{A}, T_j = 25^{\circ}\text{C}$	V_F		1.4	1.7	V
	$I_F = 10\text{A}, T_j = 175^{\circ}\text{C}$			1.7	2.0	
Reverse Current	$V_R = 650\text{V}, T_j = 25^{\circ}\text{C}$	I_R		5	20	μA
	$V_R = 650\text{V}, T_j = 175^{\circ}\text{C}$			80	200	
Total Capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	C		608		pF
	$V_R = 200\text{V}, f = 1\text{MHz}$			58		
	$V_R = 400\text{V}, f = 1\text{MHz}$			48		
Total Capacitance Charge	$V_R = 400\text{V}, T_j = 25^{\circ}\text{C}$	Q_C		35		nC
Capacitance Stored Energy	$V_R = 400\text{V}$	E_C		7.5		μJ

CHARACTERISTIC CURVES

Fig. 1- Forward Characteristics

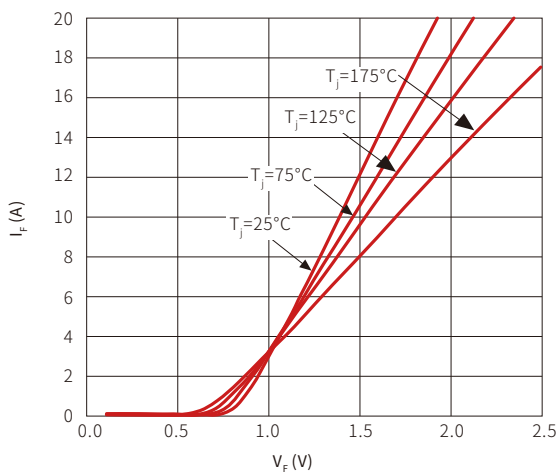


Fig. 2-Reverse Characteristics

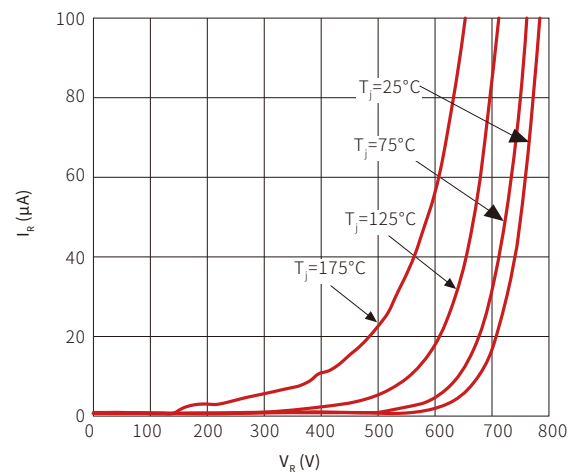


Fig. 3-Capacitance Vs. Reverse Voltage

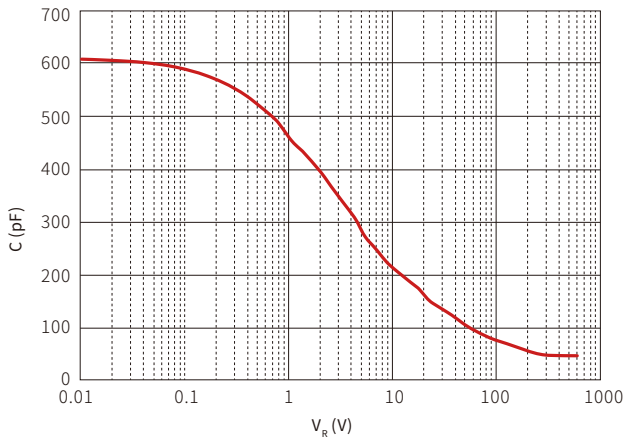


Fig. 4-Transient Thermal Impedance

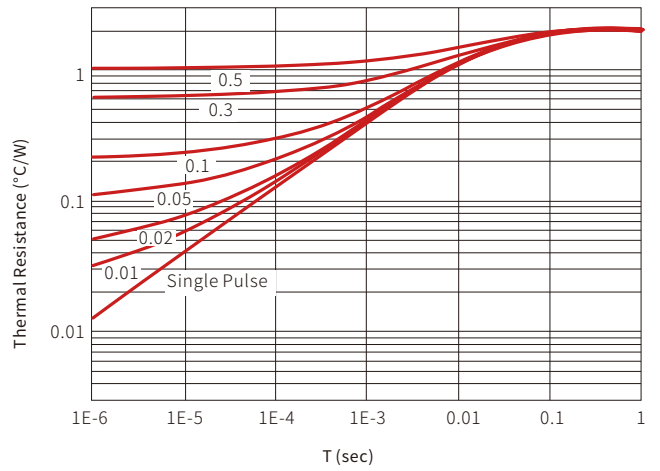


Fig. 5-Capacitance Charge vs. Reverse Voltage

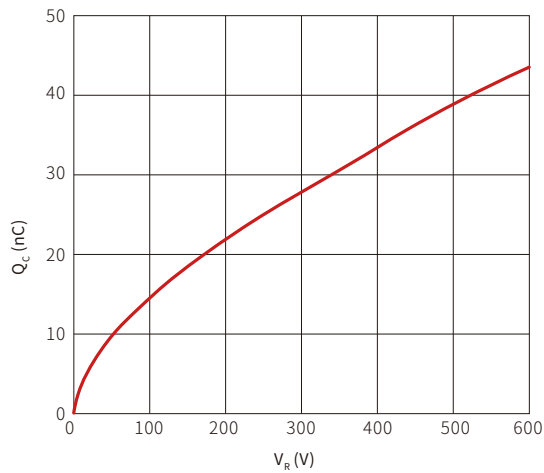


Fig. 6-Capacitance Stored Energy

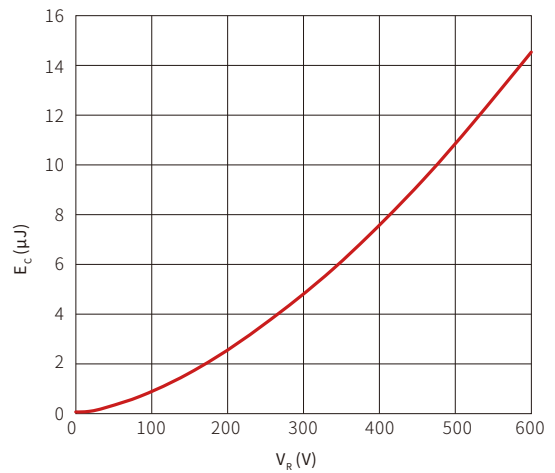


Fig. 7-Power Derating



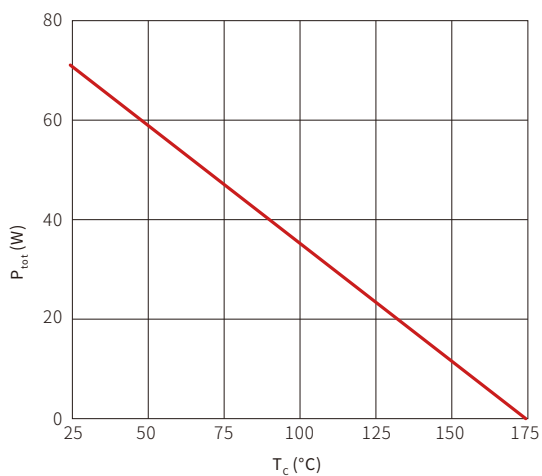


Fig. 8-Current Derating

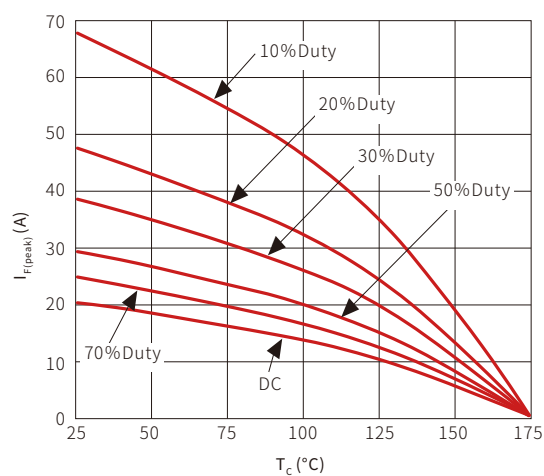


WAVE SOLDERING

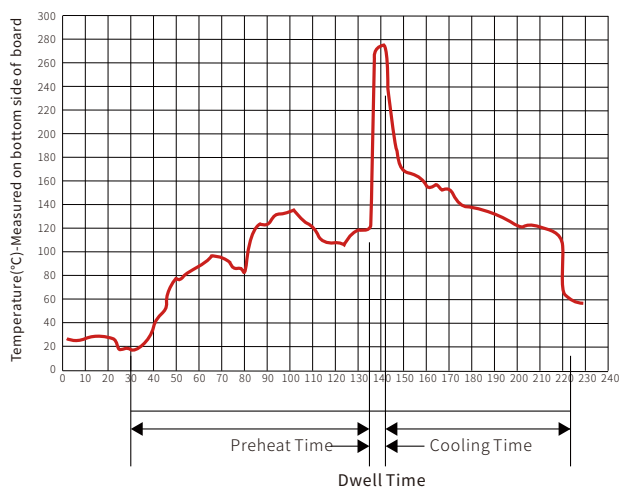

Wave Parameter		Lead-free assembly
Pre Heat	Temperature Min	100°C
	Temperature Max	150°C
	Time(min to max)	60 – 180 secs
Solder pot Temperature		280°C Max
Solder Dwell Time		2-5 seconds

TO-220F PACKAGE MECHANICAL DATA

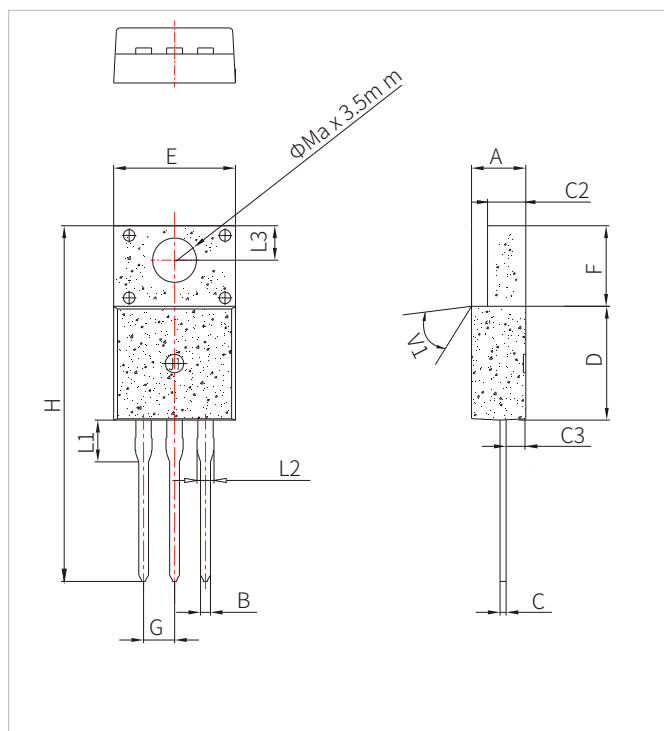

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.90	0.173		0.193
B	0.74	0.80	0.83	0.029		0.033
C	0.45		0.75	0.018		0.030
C2	2.40		2.70	0.094		0.106
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.70		10.4	0.382		0.409
F	6.40		7.00	0.252		0.276
G		2.54			0.1	
H	28.0		30.0	1.102		1.181
L1		3.55			0.140	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	

ORDERING INFORMATION

Part Number	Component Package	Marking	QTY/Tube	QTY/Box	QTY/Carton
SCS10A65FA1	TO-220F	 10A65 XXXX	50PCS	1000PCS	5000PCS

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware' s global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.