



## FEATURES

- | Advanced trench cell design
- | Low Thermal Resistance




## APPLICATION

- | Motor drivers
- | DC - DC Converter



## APPROVALS

<b>RoHS</b>	Compliance with 2011/65/EU
<b>HF</b>	Compliance with IEC61249-2-21:2003



Schematic Symbol

## ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Drain-Source Voltage $T_c=25^\circ\text{C}$	$V_{DS}$	-200	V
Gate-Source Voltage $T_c=25^\circ\text{C}$	$V_{GS}$	$\pm 20$	V
Drain Current (DC) $T_c=25^\circ\text{C}$ , $V_{GS}=-10\text{V}$	$I_D^{***}$	-15	A
Drain Current (Pulsed) * $T_c=25^\circ\text{C}$ , $V_{GS}=-10\text{V}$	$I_{DM}^{***}$	-60	A
Diode Forward Current $T_c=25^\circ\text{C}$	$I_S$	-15	A
Drain power dissipation $T_c=25^\circ\text{C}$	$P_{tot}^*$	89	W
Thermal Resistance- Junction to Ambient	$R_{\theta JC}^{***}$	62.5	$^\circ\text{C}/\text{W}$
Junction Temperature	$T_J$	-55 to 150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 to 150	$^\circ\text{C}$

Notes:

\* Surface Mounted on 1 in<sup>2</sup> pad area,  $t \leq 10$  sec

\*\* Pulse width  $\leq 10\mu\text{s}$ , duty cycle  $\leq 1\%$

\*\*\* Limited by bonding wire

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>Static Characteristics</b>						
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =-250μA	-200			V
Drain Leakage Current	I <sub>DSS</sub>	V <sub>DS</sub> =-200V, V <sub>GS</sub> =0V			-25	μA
		V <sub>DS</sub> =-200V, V <sub>GS</sub> =0V, T <sub>J</sub> =85°C			-30	μA
Gate Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V			±100	nA
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250μA	-2		-4	V
On-State Resistance	R <sub>DS(on)</sub> <sup>a</sup>	V <sub>GS</sub> =-10V, I <sub>D</sub> =-12A			650	mΩ
<b>Gate Charge Characteristics<sup>b</sup></b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> =-80V, V <sub>GS</sub> =-10V, I <sub>DS</sub> =-12A		35		nC
Gate- Source Charge	Q <sub>gs</sub>			6		nC
Gate- Drain Charge	Q <sub>gd</sub>			15		nC
<b>Switching Characteristics</b>						
Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>DS</sub> = - 50 V, V <sub>GEN</sub> = - 10 V, R <sub>G</sub> = 3.3 Ω, I <sub>D</sub> = -10A		13		nS
Turn-On Rise Time	t <sub>r</sub>			16		nS
Turn-Off Delay Time	t <sub>d(off)</sub>			52		nS
Turn-Off Fall Time	t <sub>f</sub>			25		nS
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =-25V, V <sub>GS</sub> =0V Frequency = 1 MHz		1210		pF
Output Capacitance	C <sub>oss</sub>			170		pF
Reverse Transfer Capacitance	C <sub>rss</sub>			45		pF
<b>Diode Characteristics</b>						
Diode Forward Voltage	V <sub>SD</sub> <sup>a</sup>	I <sub>SD</sub> = -12A, V <sub>GS</sub> = 0V			-1.3	V
Reverse Recovery Time	t <sub>rr</sub>	I <sub>SD</sub> = -12 A, dI <sub>SD</sub> / dt=100A/μs		200		nS
Reverse Recovery Charge	Q <sub>rr</sub>				2	

**Notes:**

a: Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%

b: Guaranteed by design, not subject to production testing

# PARAMETER CHARACTERISTIC CURVE

Figure1: Power Capability

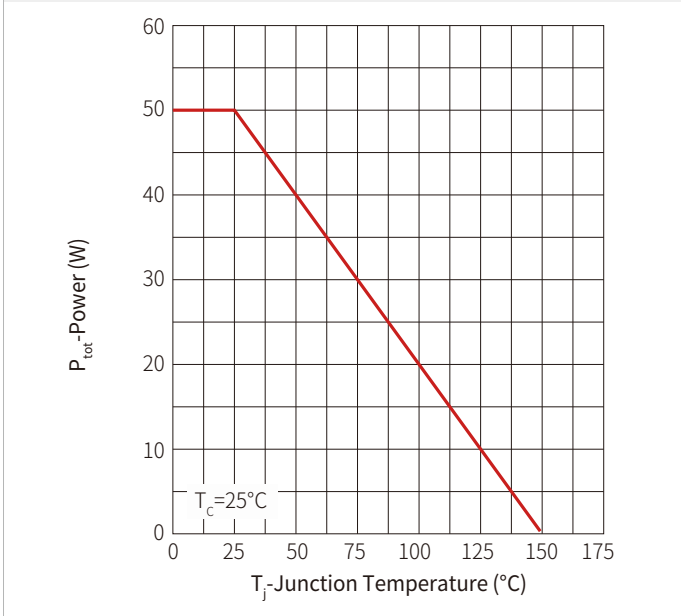


Figure2: Current Capability

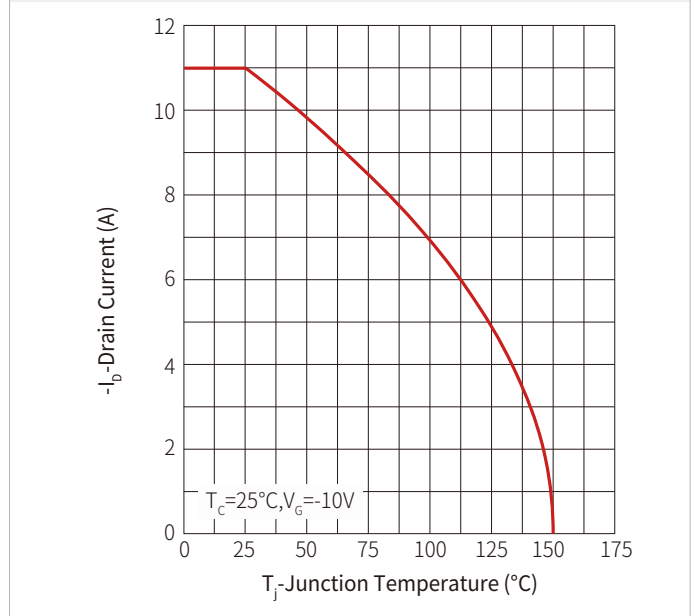


Figure3: Safe Operation Area



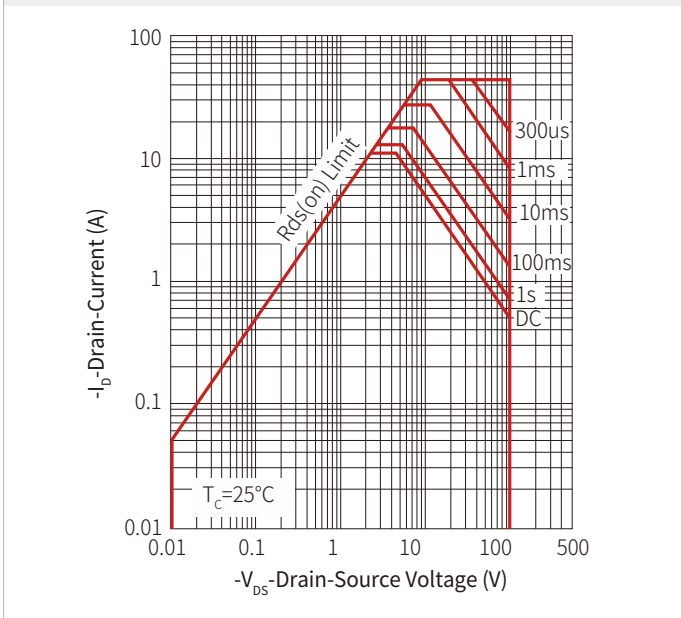



Figure 4: Transient Thermal Impedance

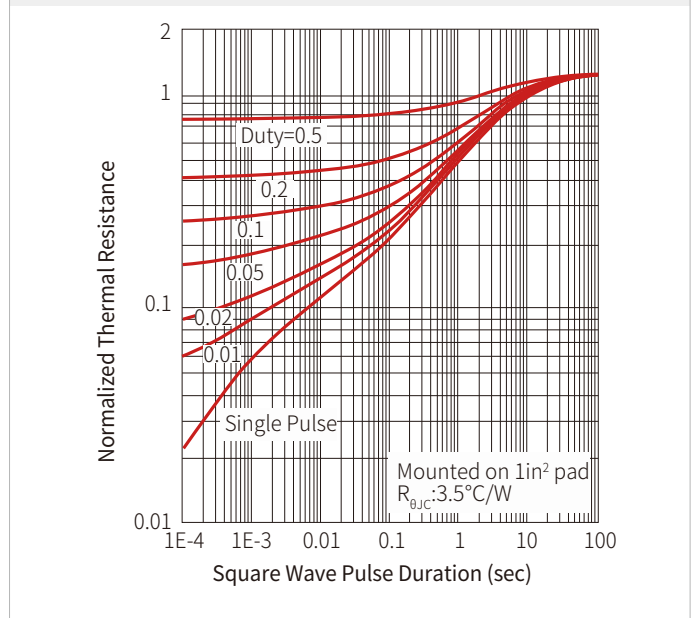


**Figure 5: Output Characteristics**

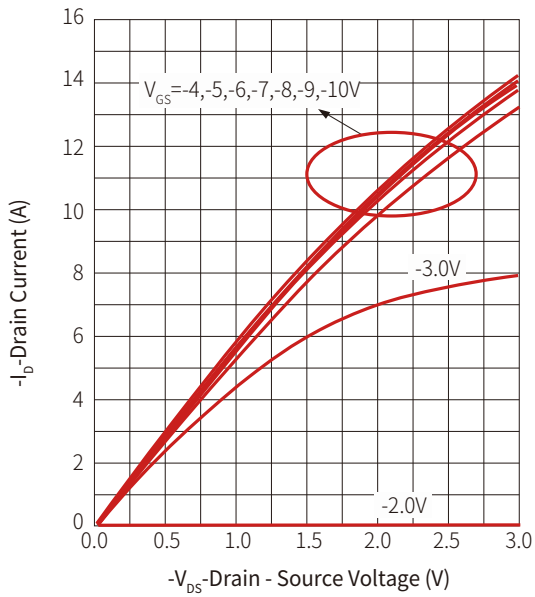


**Figure 6: Drain-Source On Resistance**

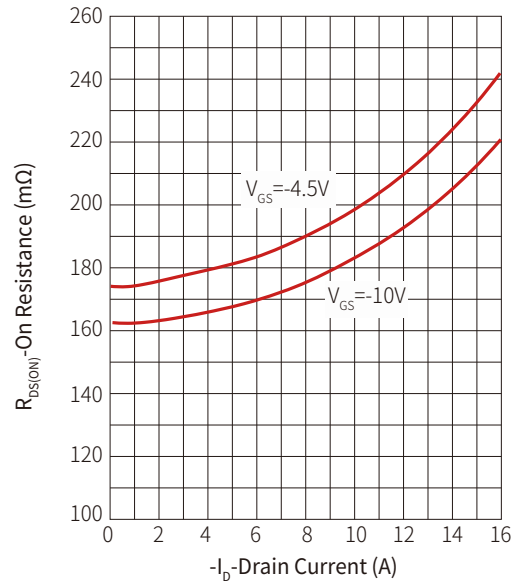


**Figure 7: Transfer Characteristics**

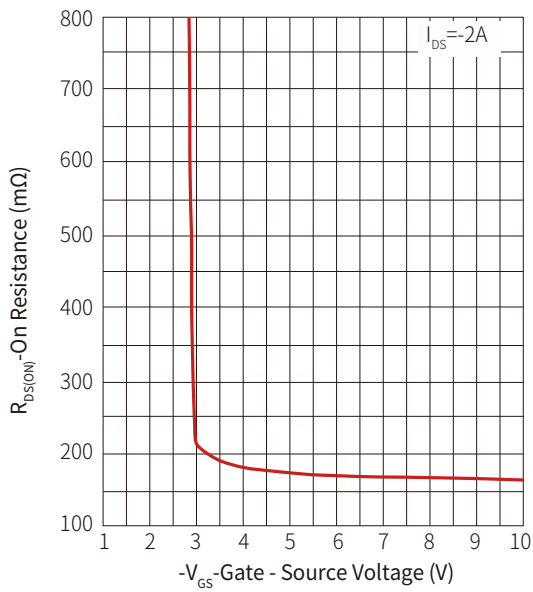


**Figure 8: Normalized Threshold Voltage**

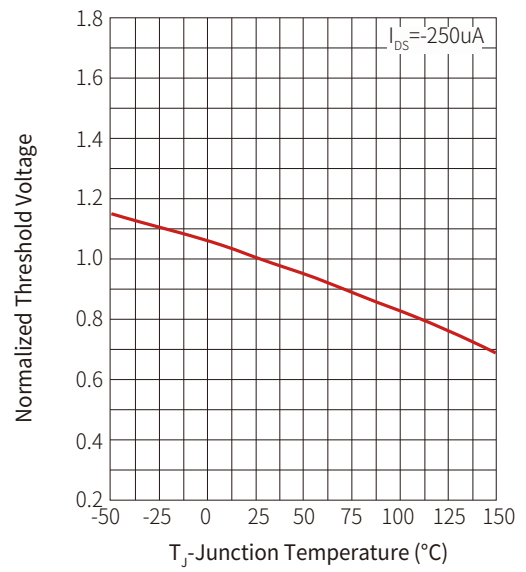


**Figure 9: Normalized On Resistance**

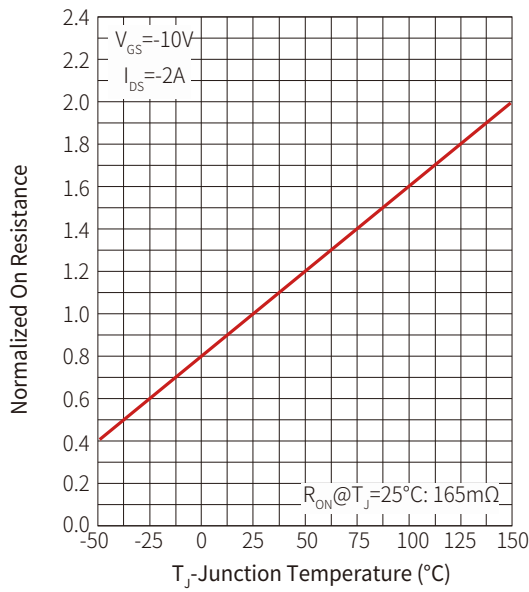


**Figure 10: Diode Forward Current**

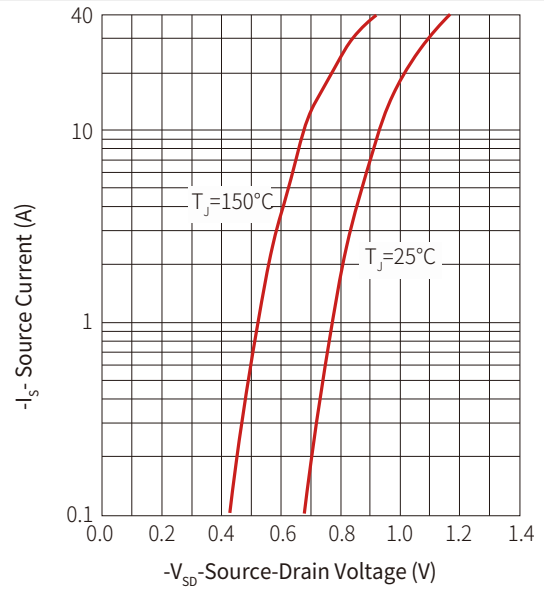


**Figure 11: Capacitance**

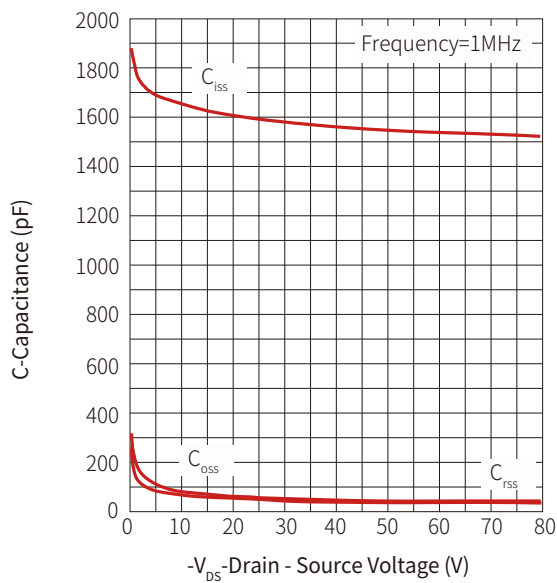

**Figure 12: Gate Charge**

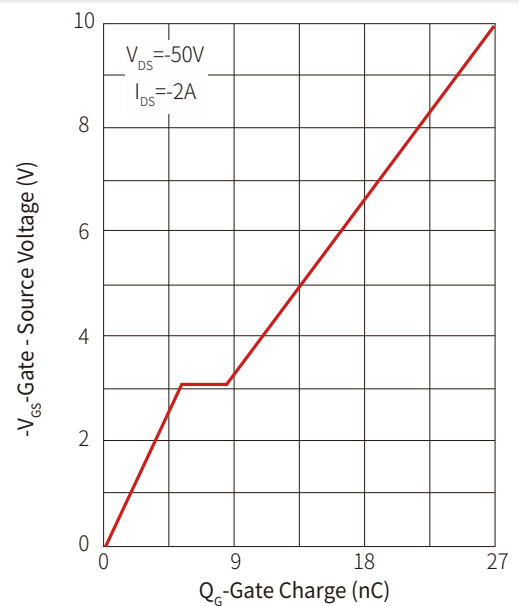

## TO-252 PACKAGE MECHANICAL DATA

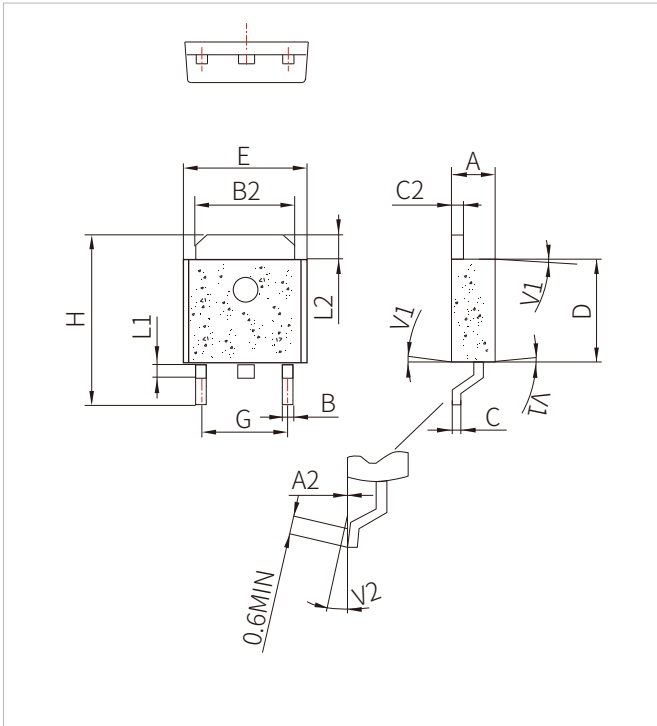

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0.03		0.23	0.001		0.009
B	0.55		0.65	0.022		0.026
B2	5.10		5.40	0.200		0.213
C	0.45		0.62	0.018		0.024
C2	0.48		0.62	0.019		0.024
D	6.00		6.20	0.236		0.244
E	6.40		6.80	0.252		0.268
G	4.40		4.70	0.173	0.1	0.185
H	9.35		10.7	0.368		0.421
L1	1.30		1.70	0.051	0.143	0.067
L2	1.37		1.50	0.054		0.059
V1		4°			0.130	
V2	0°		8°	0°		8°

## ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
SPM15P20K	TO-252	2500PCS	13"

**Headquarters**

No.3387 Shendu Road  
Pujiang I&E Park  
Minhang Shanghai China  
201000

**Hotline**

400-021-5756

**Web**

<https://www.semiware.com>

**Sales Center**

Tel: 86-21-3463-7458  
Email: [sales18@semiware.com](mailto:sales18@semiware.com)

**Customer Service**

Tel: 86-21-5484-1001  
Email: [sales17@semiware.com](mailto:sales17@semiware.com)

**Technical Support**

Tel: 86-21-3463-7654  
Email: [fae01@semiware.com](mailto:fae01@semiware.com)

**Complaint & Suggestions**

Tel: 86-21-3463-7172  
Ext: 8868  
Email: [cs03@semiware.com](mailto:cs03@semiware.com)

**By QR Code**

Website



Wechat

To find your local partner within Semiware' s global website: [www.semiware.com](http://www.semiware.com)

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.